


DUR-O-WAL

MASONRY PRODUCT CATALOG

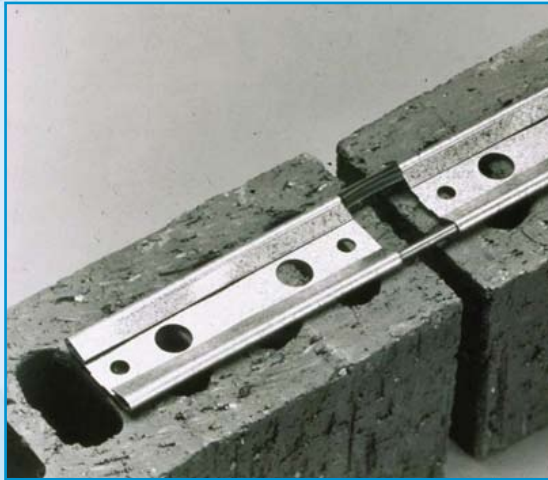

Index

DESIGN INFORMATION AND MATERIAL SPECIFICATIONS.....	2
STEEL LINTELS.....	3-5
DUR-O-SPLICE.....	6
SHELF ANGLE & OCM MASONRY ANCHOR.....	7
DOVETAIL AND CHANNEL ANCHOR SYSTEMS.....	8-9
TIES, ANCHORS AND VENEER ANCHORS.....	10-13
SEISMIC TIES AND ANCHORS.....	14-16
REBAR POSITIONERS AND OTHER PRODUCTS.....	17-18
STONE ANCHORS.....	19
MOVEMENT CONTROL PRODUCTS.....	20-21
MOISTURE CONTROL PRODUCTS.....	22-24
GLASS BLOCK MASONRY ACCESSORIES.....	25
SINGLE WYTHE SYSTEMS.....	26
MULTI-WYTHE NON-ADJUSTABLE SYSTEMS.....	27-28
MULTI-WYTHE ADJUSTABLE SYSTEMS.....	29
SEISMIC JOINT REINFORCEMENT.....	30-33
RANDOM / RUBBLE STONE SYSTEM.....	34
DUR-O-WAL SPECIFICATIONS.....	35-36
BRACE RITE® SYSTEM.....	37-39
RESTORATION ANCHORS.....	40
DUR-O-WAL SAFETY INFORMATION.....	41

Detailed Index

Product	Page	Product	Page	Product	Page
# 6 Wide Flange PVC Control Joint.....	20	Dur-O-Splice End Anchor.....	6	PowerSPAN True Arch Lintel.....	4
# 8 Wide Flange PVC Control Joint.....	21	Dur-O-Splice Tapered Threaded Rebar.....	6	PVC Sheeting.....	22
#12 Wide Flange PVC Control Joint.....	21	Dur-O-Splice Thread Protector.....	6	Rapid "T" PVC Control Joint.....	21
#6 Wide Flange Rubber Control Joint.....	20	Dur-O-Stop.....	18	Rapid "T" Rubber Control Joint.....	20
Adjustable Dur-O-Tab with Restraint Bar.....	34	Dur-O-Tab.....	28	Rapid Expansion Joint.....	21
Adjustable Rectangular Cavity Wall Ties.....	12	Fil-Stop.....	18	Rapid Soft Joint.....	21
Adjustable Rectangular Tab Tie		Floor Bracket.....	38	Rebar Positioners.....	17
w/ Masonry Strap Anchor.....	11	Foundation Clip.....	39	Rebar Positioners.....	17
Adjustable Seismic Wall Eye Plate.....	15	Glass Block Panel Anchors.....	27	Rectangular Cavity Wall Ties.....	12
Adjustable Speed Set Veneers Ties.....	10	Heavy Duty Seismic Ladur-Eye.....	30	Regular PVC Control Joint.....	20
Askew Bolt.....	7	Ins-O-Grips.....	18	Regular Rubber Control Joint.....	20
Backing Plate.....	38	Joint Stabilizing Anchor.....	21	Seismic Veneer Anchor Pintles.....	14
Brace Clip.....	38	Ladur.....	26	Seismic Veneer Anchor Plates.....	14
BRACE-RITE HD Pipe Brace.....	37	Ladur Double Side Rod.....	26	Seismic Channel Anchor.....	15
BRACE-RITE HD Long Pipe Brace.....	37	Ladur Joint Reinforcement.....	27	Seismic Combs.....	15
BRACE-RITE Regular Pipe Brce.....	37	Ladur Trirod.....	27	Seismic Dovetail Anchors.....	14
Brick Replacement Anchor.....	40	Ladur-Eye.....	29	Seismic Dur-O-Eye.....	30
Cell Vents.....	23	Lite Duty Seismic Channel Anchor.....	9	Seismic Ladur	
Channel Anchor.....	9	Lite Duty Seismic Dovetail Triangular Ties.....	16	(Masonry Reinforcement for Veneers).....	16
Channel Anchor Slot.....	8, 9	Lite Duty Seismic Dur-O-Eye.....	31	Seismic Ladur Joint Reinforcement.....	33
Channel Anchor Triangular Ties.....	9	Lite Duty Seismic Ladur-Eye.....	31	Seismic Veneer Anchor.....	14
Coil Anchor.....	39	Lite Duty Seismic Pintles.....	15	Shelf Angle Insert.....	7
Column Anchor.....	12	Lite Duty Seismic Triangular Tie.....	15	Stainless Steel Screw.....	11
Column Anchor Weld-On.....	13	Masonry Expansion Anchor.....	11	Stone Anchors.....	8, 19
Column Flange Ties.....	13	Mechanical Anchor Series.....	40	Strongback Ties.....	38
Continuous Channel Anchor Slot.....	9	Metal Stud Veneer Screw.....	11	Strongbacks and Struts.....	39
Continuous Rectangular Tab Tie (CRT).....	28	Mor-Control.....	24	Termination Bar.....	23
Copper Coated Thru-Wall Flashing.....	22	Mortar Net™.....	24	Trapezoid Ties (or Web Ties).....	13
Copper Fabric Thru-Wall Flashing.....	22	Mortar-Stop™.....	24	Triangular Tie Series.....	12
Copper Kraft Duplex Flashing.....	22	Mounting Plate.....	38	Triangular Ties with Restraint Bar.....	34
Corrugated Wall Ties.....	13	MSSA Veneer Anchor Screw-On Straps.....	10	Truss.....	26
DCF Flashing Tape.....	22	Nut.....	7	Truss Double Side Rod.....	27
DCF Thru-Wall Flashing.....	22	OCM Masonry Anchor.....	7	Truss Trirod.....	27
Dovetail Anchor.....	8	Pencil Rod Deformed (Straight and Cut).....	16, 32	Veneer Anchor Screw-On Plates.....	10
Dovetail Anchor Slots.....	8	Plastic Horseshoe Washers.....	7	Veneer Anchors (Plates and Pintles).....	10
Dovetail Triangular Ties Anchor.....	8	Poly-Barrier Thru-Wall Flashing.....	23	Wall Ties.....	38
Dovetail Triangular Ties Series.....	8	PowerBOX Recessed Door Header.....	4	Wall Top Stabilizing Anchor.....	21
Drip Edge Flashing.....	23	PowerBOX Steel Lintel.....	4	Wedges.....	38
Dur-O-Barrier Tapes.....	25	PowerSPAN Brick Veneer Lintel.....	5	Weep Holes or Tubes.....	23
Dur-O-Barrier Thru-Wall Flashing.....	23	PowerSPAN Cantilever Corner Lintel.....	5	Window Sill.....	5
Dur-O-Eye.....	29	PowerSPAN Elliptical Steel Lintel.....	5	Wire Mesh Ties.....	13
Dur-O-Fibar.....	18	PowerSPAN Flat Radius Lintel.....	4	Wood Stud Veneer Screw.....	11
Dur-O-Flex Friction Pinning Anchor.....	40	PowerSPAN I-Beam.....	5	"Z" Cavity Wall Ties.....	11
Dur-O-Splice Coupler.....	6	PowerSPAN L-2 Lintel.....	4		

Index

Item	Page	Item	Page	Item	Page
BR20	37	DA800BP	38	DA1544	23
BR23	37	DA800CA	39	DA2001	20
BR39	37	DA800FB	38	DA2002	20
DA100	8	DA800FC	39	DA2003	20
DA101	8, 19	DA800MP	38	DA2004	20
DA102	19	DA800S	39	DA2006	21
DA103	19	DA800SBP	38	DA2007	21
DA131	14	DA800ST	38	DA2010	21
DA200	8	DA800W	38	DA2015	21
DA201	19	DA800WT	38	DA2016	25
DA203	19	DA801	10	DA2020	21
DA204	19	DA807	11	DA2025	20
DA205	19	DA808	11	DA2100	18
DA207	10	DA810	17	DA2200	21
DA210	10	DA811	17	DA3000SL	11
DA210X	10	DA812	17	DA3100	26
DA213	10, 14	DA813	15	DA3100DSR	27
DA213 S	14	DA815	17	DA3100TR	27
DA213QT	15	DA816	17	DA3200	26
DA301	19	DA817	17	DA3200	27
DA301U	19	DA901	8	DA3200DSR	27
DA301Z	19	DA902	9	DA3200S	33
DA303	19	DA903	9	DA3200TR	27
DA304	19	DA904	9	DA3200S	16
DA305	19	DA911	19	DA3300SL	34
DA306	19	DA913	19	DA3400	28
DA307	19	DA914	19	DA3500	28
DA308	19	DA917	19	DA3600	29
DA309	19	DA918	9	DA3600ES	31
DA331	19	DA918QQT	16	DA3600S	30
DA332	19	DA931	9, 15	DA3700	29
DA333	19	DA960	13	DA3700ES	31
DA334	19	DA980	13	DA3700S	30
DA335	19	DA990	13	DA5000	40
DA336	19	DA995	34	DA5100	40
DA337	19	DA1001	7	DA5213	40
DA338	19	DA1002	7	DA5213S	40
DA339	19	DA1003	7	DA5300	40
DA411	21	DA1004	7	DA5410	40
DA431	14	DA1005	23	DA5431	40
DA500	11	DA1006	23	DA5610	11
DA508	40	DA1007	24	DA5801	40
DA510	12	DA1008	24	DA8200	6
DA511	12	DA1009	24	DA8210	6
DA518	12	DA1010	18	DA8220	6
DA519	15	DA1015	18	DA8230	6
DA601	12	DA1018	18	DA8706	16
DA604	2	DA1020	18	DA8706	32
DA700	12	DA1070	27	DA8801	7
DA700QT	15	DA1501	22	DA9000	4
DA700WB	34	DA1502	22	DA9100	4
DA709	13	DA1505	22	DA9150	5
DA720	8	DA1506	22	DA9200	4
DA720	8	DA1507	22	DA9300	4
DA720QT	16	DA1508	22	DA9400	4
DA730	13	DA1510	23	DA9500	5
DA750	13	DA1525	23	DA9600	5
DA800BC	38	DA1540	23	DA9800	5
				DA9900	5

DUR-O-WAL has been manufacturing and supplying quality products to the masonry construction industry since 1939. As an innovator in designing new and improved products for masonry construction, we have been responsible for state-of-the-art systems for moisture control, seismic applications, masonry connection and masonry repair. Years of experience in engineering, manufacturing and serving the masonry industry have provided us with a thorough understanding of the needs of masonry construction professionals everywhere. DUR-O-WAL maintains ongoing product-testing and quality control to insure that every product meets the highest industry standards. Our knowledge of the engineering of masonry structural performance gives you the confidence to say...

DUR-O-WAL can truly "Do It All".

© Copyright 2008 - Dayton Superior Corporation

Design Information

BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES (ACI 530-05/ASCE 5-05/TMS 402-05) and SPECIFICATIONS FOR MASONRY STRUCTURES (ACI 530.1-05/ASCE 6-05/TMS 602-05)

The above Code and Specifications states the following: Joint reinforcement, wall ties and anchors shall be stainless steel or protected from corrosion by a hot-dipped galvanized coating or epoxy when used in masonry that is exposed to organic matter or weather and interior walls exposed to a mean relative humidity exceeding 75%. All other joint reinforcement, wall ties, anchors and inserts shall be mill galvanized, hot dipped galvanized or stainless steel. Anchor Bolts, steel plates and bars not exposed to earth, weather nor exposed to a mean relative humidity exceeding 75%, need not be coated.

CORROSION PROTECTION

Corrosion (rusting) of masonry joint reinforcement, ties and anchors will ultimately lead to product failure with resulting damage to the masonry structure. To assist the user in selecting the proper corrosion protection, Dur-O-Wal offers the following comments:

- Products manufactured from stainless steel offer the greatest level of corrosion resistance. Dur-O-Wal recommends stainless steel products for use in light-colored masonry construction and where maximum corrosion resistance for joint reinforcement, ties and anchors is required.
- Hot Dip Galvanized (HDG) provides a thick zinc coating that is applied after fabrication to assure that welds and exposed (cut) edges are coated. Usually specified when joint reinforcement, ties and/or anchors are to be embedded in masonry exposed to earth, weather conditions and/or areas of high humidity.
- Mill Galvanized provides a thin zinc coating that is applied to the steel before product fabrication. Mill galvanizing provides a balance between economy and corrosion resistance. Welds and exposed edges are not protected with zinc. Mill galvanized products are normally specified for joint reinforcement, ties and/or anchors used in interior masonry construction that is not exposed to high relative humidity conditions, but never in Glass Block Masonry.
- Dur-O-Wal does not recommend the use of joint reinforcement, ties and anchors manufactured from brite basic wire or plain (uncoated) carbon steel sheet metal as such products are not protected from corrosion and will corrode while stored in a warehouse, in transit or in storage at a jobsite. Consider the use of plain steel only when field welding would make galvanized ties and anchors impractical or when parts are to be galvanized after fabrication.
- Most building codes do not require structural components such as anchor bolts, steel plates or bars exposed to earth, weather conditions or high humidity to have corrosion protection.
- Epoxy coating is not recommended by Dur-O-Wal for corrosion protection due to “holidays” that develop during the coating process and the potential for subsequent corrosion that may result from them.
- For extended life and corrosion protection, restoration anchors are fabricated with brass sleeves, brass extension cones, stainless steel inner rods and stainless steel or HDG bolts and washers.
- Please see individual product descriptions for specific material and finish information.

DUR-O-WAL MATERIAL, PRODUCT AND CORROSION PROTECTION SPECIFICATIONS

MATERIAL	ASTM STANDARD SPECIFICATIONS
Brass	ASTM B-16/B16M-05
Bolts and Anchor Bolts	A307-07b
Masonry Joint Reinforcement	A951/A951M-06
PVC Control Joints	D2207-00 (2005)
Reinforcing Steel	A615/A615M-07
Rubber Control Joints	D2000-08
Sheet Metal, Carbon Steel	A1008/A1008M-07a, A109/A109M-03 and A1011/A1011M-07
Sheet Metal, Hot Dipped Galvanized	A153/A153M-05 (1.50 oz/ft ² - 458 g/m ²)
Sheet Metal, Mill Galvanized	A653/A653M-07 (0.60 oz/ft ² - 183 g/m ²)
Sheet Metal, Stainless Steel	A167-99 (2004) - Type 304
Steel Plate, Carbon Steel	A36/A36M-05
Wire, Carbon Steel	A82/A82M-07
Wire, Hot Dipped Galvanized	A153/A153M-05 (1.50 oz/ft ² - 458 g/m ²)
Wire, Mill Galvanized	A641/A641M-03 (0.10 oz/ft ² - 30 g/m ²)
Wire, Stainless Steel	A580/A580M-06

NOTE: Thin brick or stone weighing 15 psf or less does not need to be mechanically attached to structural backing. This material is adhered directly to the backing.

POWERBOX AND POWERSPAN STEEL LINTELS

The steel lintels offered by Dur-O-Wal are a distinctly different type of lintel, designed especially for masonry construction. These steel lintels offers a real alternative, in both residential and commercial masonry structures, to the traditional angle iron, cast stone, cast-in-place or precast concrete lintels. Dur-O-Wal steel lintels will span openings as narrow as 1'-4" and as wide as 40'-0".

Due to their lightweight, PowerBOX and PowerSPAN steel lintels are easy to lift and set into position. One or two workers can easily install these lintels without effort or injury. Not only do these lintels offer the mason contractor savings in labor costs, due to less workers required for installation, they also offer the additional advantage of reducing workers compensation insurance claims, when compared to using heavy cast stone or precast concrete lintels. In addition, these lintels do not require costly "special inspection" during installation. Professionally engineered and factory fabricated, allowing the architect or engineer to quickly and easily design large open affordably spaces using masonry construction.



LOAD TABLES

Load tables are available on request, listing clear span, lintel length, allowable gravity, up-lift and out-of-plane super-imposed loads. Load tables specify any rebar that may be required as well as the height of CMU that is required to be solidly grouted for composite action with the lintel.

FEATURES

- Easy to install.
- Only one person needed to set.
- Length sized to fit project opening.
- Meets or exceeds most load bearing requirements and codes in all 50 states.
- Eliminates columns.
- Can reduce insurance costs.

[For complete information, please request a copy of our Dur-O-Wal Steel Lintel brochure \(DOW10\).](#)



27' - 4" Clear Span - No Columns!

Steel Lintels

LINTEL TYPES

Due to their lightweight, PowerBOX and PowerSPAN steel lintels are easy to lift and set into position. One or two workers can easily install these lintels without effort or injury. Not only do these lintels offer the mason contractor savings in labor costs, due to less workers required for installation, they also offer the additional advantage of reducing workers compensation insurance claims, when compared to using heavy cast stone, cast-in-place or precast concrete lintels. In addition, these lintels do not require costly "special inspection" during installation.

The Dur-O-Wal Steel Lintel are offered in the following types and sizes:

DA9000 PowerBOX Steel Lintel

U.S. Patent #6367209

- Eliminates first course of CMU above opening.
- Nominal 8" x 8".
- Actual size is 7-5/8" wide x 7-5/8" tall.
- Clear spans from 3'-2" to 40'-0".
- 8" lintel end bearing on supporting CMU, depending on lintel length.
- 18 or 16 gauge thickness depending on lintel length.
- 18 gauge weighs 4.3 plf and 16 gauge weighs 5.4 plf.
- 4 hour fire rating when grouted solid.
- Large 4-1/2" grout opening at each end.



DA9100 PowerBOX Recessed Door Header

Patent #6367209

- Eliminates first course of CMU above door.
- Nominal 8" x 6".
- Actual size is 7-5/8" wide x 5-5/8" tall.
- Header clear spans from 1'-6" to 18'-8".
- 8" header end bearing on supporting CMU, depending on header length.
- 16 gauge thickness.
- 4 hour fire rating when grouted solid.
- Large 4-1/2" grout opening at each end.



DA9200 PowerSPAN L-2 Lintel

U.S. Patent #5465538

- Half the weight of traditional angle iron lintels, yet just as strong.
- 6-3/4" wide for use with 8" nominal CMU.
- Two 2-1/2" tall center ribs for added strength.
- Lintels lengths from 1'-6" to 36'-0".
- 4" end bearing on supporting CMU.
- 16 gauge thickness.
- Weighs 3.3 plf.
- Can be cut to length at jobsite.



DA9300 PowerSPAN TRUE ARCH LINTEL

Patent #5465538

- Use where fully arched openings are required.
- 6-3/4" wide for use with 8" nominal CMU.
- 2-1/2" tall center rib for added strength.
- 4" end bearing on supporting CMU.
- 12 gauge thickness.
- Speeds construction time.
- Available in a wide variety of radiuses, custom sized to project specifications.
- No wood forming necessary to obtain a true radius.



DA9400 PowerSPAN Flat Radius Lintel

U.S. Patent #5465538

- Use to construct accurate curved masonry corner or window walls.
- 6-3/4" wide for use with 8" nominal CMU.
- 2-1/2" tall center rib for added strength.
- 4" end bearing on supporting CMU.
- 12 gauge thickness.
- Allows flat radius lintels to be accurately fabricated to required radius.



DA9500 PowerSPAN Cantilever Corner Lintel

U.S. Patent #5465538


- Designed to create dramatic and unobstructed corner views.
- 6-3/4" wide for use with 8" nominal CMU.
- Two 2 1/2" tall center ribs for added strength.
- 4" end bearing on supporting CMU.
- 16 gauge thickness.
- 5'-4" standard leg lengths for up to 4'-0" cantilevers.



DA9600 PowerSPAN Brick Veneer Lintel

U.S. Patent #5465538

- Allows masons to accurately lay brickwork above openings.
- 12 gauge brick veneer plate.
- Use with 8" nominal CMU.
- Provides for 2" air space between brick veneer and CMU.
- Requires veneer ties or anchors to be spaced at 16" centers horizontally and vertically.



DA9800 PowerSPAN Elliptical Steel Lintel

U.S. Patent #5465538

- Use to accurately construct elliptical masonry arches.
- 6-3/4" wide for use with 8" nominal CMU.
- 2-1/2" tall center rib for added strength.
- 4" end bearing on supporting CMU.
- 12 gage thickness.



DA9900 PowerSPAN I-Beam

- Use when there is limited masonry above opening with point loads on lintel.
- Available in a wide variety of lengths and sizes as specified.
- The lintel height and the rebar size at top of lintel, can vary as required to meet project requirements.



DA9150 Window Sill

- Drip edge for extra protection from water penetration.
- Available in standard lengths from 19 3/4" to 10'-0".
- Custom sizing available.



Dur-O-Splice Masonry Rebar Splicing System

DA8200 Dur-O-Splice

The use of lap splices in vertically reinforced masonry walls can be time consuming in terms of design and installation and can lead to congestion within the cell of a concrete masonry unit, decreasing the chance of completely filling the cells with grout.

As lapped splices are dependent on the grout for load transfer, incomplete grout consolidation will significantly affect the performance of a lapped rebar splice as well as the strength of the masonry wall.

Dur-O-Wal has developed the Dur-O-Splice Rebar Splicing System, to eliminate the lap splicing of rebars. Lap splices may pull apart due to seismic forces.


The Dur-O-Splice system has been designed with a tapered thread that allows the system to develop 125% of the Grade 60 rebar's yield strength, when snug tightened. A torque wrench is not normally required to tighten the coupler onto the tapered threaded rebar.

The Dur-O-Splice System greatly simplifies vertical rebar placement, eliminating rebar congestion and increases the chance of getting complete grout consolidation throughout the wall

The Dur-O-Splice will develop its strength even when the grout has not been completely consolidation and will retain its strength despite grout degradation from impact damage or seismic forces.

FEATURES

- Design friendly.
- No special tools or skills required.
- Conforms to masonry building codes.
- Eliminates lap splicing of rebars.
- Simplifies rebar installation.
- Reduces rebar congestion.
- Fast and cost effective.
- Increases chance of 100% grout filled cells.
- Self aligning tapered threads for ease of installation.
- Tapered threads prevents cross-threading.
- Reduces the total amount of rebar due to the elimination of lap splices.

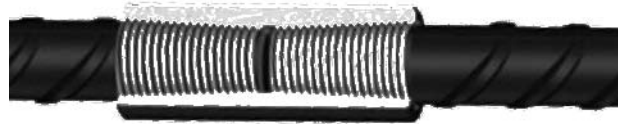

The Dur-O-Splice System consists of four parts:

- DA8200 Tapered Threaded Rebar
- DA8210 End Anchor
- DA8220 Thread Protector
- DA8230 Standard Coupler

ICC Evaluation Services approval report:
ESR-2481

Sizes vary with size of rebar specified.

DA8200 TAPERED THREADED REBAR

Available in #4, #5 and #6 rebar sizes and in standard lengths of 48" or 64" with other lengths available on special order. The threaded ends are protected by plastic thread protectors.



DA8210 DUR-O-SPLICE END ANCHOR

An over-sized end anchor that is threaded onto the end of a DA8200 tapered threaded rebar. The end anchor creates anchorage the necessary resistance to pull-out from the concrete footer. This is an alternative to a 90° hooked rebar or anchor bolt.



DA8220 DUR-O-SPLICE THREAD PROTECTOR

A plastic break-away thread protector is placed over the end of an installed tapered threaded rebar to protect the threads from mortar dropping.



DA8230 DUR-O-SPLICE COUPLER

A round carbon steel rebar coupler that has tapered threads at both ends. Coupler is easily snug tightened onto the DA8200 Tapered Threaded Rebar.



Shelf Angle and OCM Masonry Rebar Anchor

DA8801 OCM Masonry Anchor

Function: A mechanical rebar anchoring system consisting of a mechanical expansion anchor preassembled to a length of Grade 60 rebar. Installs with just a sledge hammer “blow”.

Can be used as a foundation dowel or to tie vertical reinforcing steel in masonry wall construction to a poured-in-place concrete foundation or floor slab.


- Quick and easy rebar installation.
- Place rebar exactly where needed.
- No installation delays due to bad weather.
- No chemicals required during installation.
- No curing time required.
- Provides excellent labor savings.

Dimensions: Available in the following standard sizes and lengths:

- Expansion Anchor with #4 x 24” long rebar.
- Expansion Anchor with #5 x 30” long rebar.
- Expansion Anchor with #6 x 36” long rebar.

Above lengths do not include the expansion anchor portion of the assembly. Other lengths are available on special order.

Finish: The expansion anchor (Expander Sleeve and Expander Cone) is electro-zinc plated with a colorless chromate coating for corrosion protection. Reinforcing steel is supplied as hot-rolled from the mill without any type of protective coating.

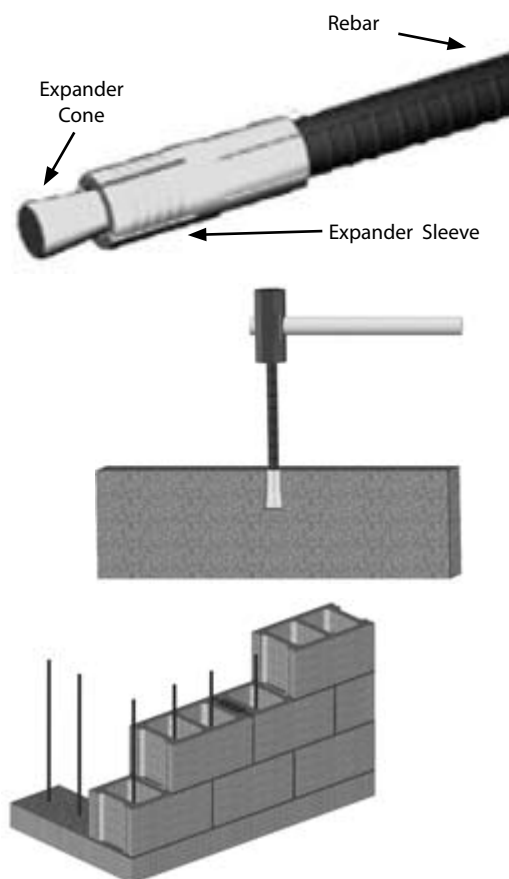

DA1001 Shelf Angle Insert

This insert is used in cast-in-place concrete construction as an anchor to attach brick shelf angles to the face of concrete. It is available for use with 3/4” Askew Head Bolts, and nuts.

Ultimate tension capacity is 7,500 lbs. in 4,000 psi normal weight concrete. To develop this capacity, the insert must be installed a minimum of 1-1/2” above the bottom edge of the concrete.

Nail holes are provided to allow for nailing of the insert to the concrete formwork.



DA1002 Askew Bolt and DA1003 Nut

Askew head bolts are made with the head at a slope to match the wedge-shaped tracks of the shelf angle insert. The bolts must be placed into the insert properly so the head of the bolt has full bearing on the insert. Care must be taken to insure that the bolt is not installed upside down.

Askew head bolts are available in 3/4” diameter x 1-1/2”, 2”, 2-1/2” and 3” lengths. Ultimate shear capacity is 9,060 lbs.

Always tighten the hex nut to a “snug tight” condition only. “Snug tight” is defined as the tightness attained to ensure that the parts of the material are in full contact with each other, plus 1/2 turn with a 12” long wrench. Careless wrench tightening or turn-of-nut tightening can induce tension loads into the insert that are in excess of the design capacity and should be avoided.



DA1004 Plastic Horseshoe Washers


Available in 1/16”, 1/8” or 1/4” thickness x 2” x 2” with 13/16” x 2-7/16” or 1/16”, 1/8” or 1/4” thickness x 3” x 4” with 13/16” x 2-15/16” slot.



Dovetail & Channel Anchor Systems

DA100 DOVETAIL ANCHOR SLOTS

- Function:** Designed to anchor masonry to new concrete with the slot embedded in concrete. Used with all DA100 Series Dovetail Anchors and DA720. Dovetail Triangular Ties Anchors, and DA200 Series Stone Anchors.
For Seismic Dovetail Anchors see Seismic Section.
- Dimensions:** 26 gage (48mm), 24 gage (0.61mm), 22 gage (0.76mm) or 20 gage (0.89mm) x 10 feet (3050mm) length.
1 inch x 1 inch x 5/8 inch throat (25mm x 25mm x 16mm)
- Finishes:** Mill Galvanized and Stainless Steel.
- Special Notes:** Slot is foam filled to protect slot during concrete forming and placement.

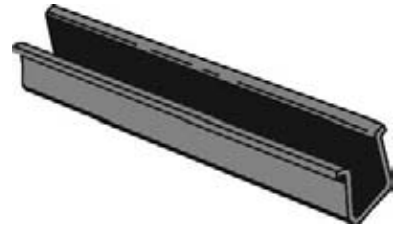

DA101 DOVETAIL ANCHORS

- Function:** Designed to anchor masonry to concrete.
Used with DA100 Dovetail Anchor Slot.
- Dimensions:** 16 gage (1.5mm), 14 gage (1.9mm), 12 gage (2.7mm) x 1 inch (25mm) wide x 3-1/2 inch (90mm), 4-1/2 inch (113mm), 5-1/2 inch (138mm), 6-1/2 inch (163mm) lengths (length does not include dovetail). Dovetail measures 1 inch (25mm) in length.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Other lengths and thickness available.
 - Other styles available with twists, bends, holes, splits, etc.
 - See Seismic Section for popular DA131 Dovetail Anchor which has been fully tested and can be substituted for DA101.



DA720 SERIES DOVETAIL TRIANGULAR TIES

- Function:** Designed to anchor masonry to concrete.
Used with DA100 Dovetail Anchor Slot.
- Dimensions:** 12 gage (2.7mm) Dovetail Clip with 3/16 inch (5mm) wire tie x 3-1/2 inch (90mm), 4-1/2 inch (113mm), 5-1/2 inch (138mm), 6-1/2 inch (163mm), 7-1/2 inch (193mm) and 9-1/2 inch (243mm) lengths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Can adapt for Seismic Zones see Seismic Section.



DA901 CHANNEL ANCHOR SLOT

- Function:** Designed to anchor masonry to concrete, CMU, brick or steel columns.
Used with DA900 Series Channel Anchors.
- Dimensions:** 16 gage (1.5mm) or 11 gage (3mm) x 8 inch (200mm) length x 1-3/4 inch (43mm) wide.
Slot measures 9/16 inch wide x 5-1/2 inches (14mm x 151mm) long
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Slot has two 5/16 inch (8mm) holes above and below slot.
 - Power-driven fasteners into concrete, block or brick not recommended.
 - Not recommended against sheathing over wood or metal stud.



Dovetail & Channel Anchor Systems

DA902 CHANNEL ANCHOR SLOT

- Function:** Designed for embedment in block masonry for anchoring veneer to CMU backing. Used with DA900 Series Channel Anchors.
- Dimensions:** Same as DA901 except has two welded 3 inch (75mm) long legs perpendicular to slot and each leg has a right angle bend.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.



DA903 CHANNEL ANCHOR SLOT

- Function:** Designed for anchoring masonry to a structure including over sheathing for wood and metal stud applications. Used with DA900 Series Channel Anchors.
- Dimensions:** Same as DA901 except is 11 inch (275mm) length.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Fabricated to enable slot to be placed for attachment flush against backing



DA904 CONTINUOUS CHANNEL ANCHOR SLOT

- Function:** Designed to anchor masonry to concrete, block, brick or steel columns. Used with DA900 Series Channel Anchors.
- Dimensions:** 16 gage (1.5mm) or 11 gage (3mm) x 8 feet (2440mm) length x 1-3/4 inch (43mm) wide. 12 usable slots measure 9/16 inch x 5-3/8 inches (14mm x 135mm).
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Not recommended against sheathing over wood or metal stud.
 - Fender washer of appropriate size required when slots are used to accommodate drill-in fasteners to concrete, block or brick.
 - Power-driven fasteners not recommended.



DA918 SERIES CHANNEL ANCHOR TRIANGULAR TIES

- Function:** Designed to anchor masonry to a structure. Used with DA901, DA902, DA903, or DA904 Channel Anchor Slots.
- Dimensions:** 12 gage (2.7mm) Channel Anchor Clip with 3/16 inch (5mm) wire tie x 3-1/2 inch (90mm), 4-1/2 inch (113mm), 5-1/2 inch (138mm), 6-1/2 inch (163mm), 7-1/2 inch (193mm) and 9-1/2 inch (243mm) lengths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Can adapt for Seismic Zones see Seismic Section.



DA931 CHANNEL ANCHORS

- Function:** Designed to anchor masonry to a structure. Used with DA901, DA902, DA903, or DA904 Channel Anchor Slots.
- Dimensions:** 16 gage (1.5mm), 14 gage (1.9mm), or 12 gage (2.7mm) x 1 inch (25mm) wide x 3-1/2 inch (90mm), 4-1/2 inch (113mm), or 5-1/2 inch (138mm) lengths (length does not include Channel Anchor "T")
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Other lengths and thickness available.
 - Older styles of DA900 Series Anchors, generally replaced with DA931, are still available.
 - Meets requirements for Seismic Zones see Seismic Section for details.



Ties, Anchors & Veneer Anchors

DA207 MSSA VENEER ANCHOR SCREW ON STRAPS

- Function:** Designed to anchor masonry to a structure.
Used with DA700 Triangular Ties or DA750 Trapezoid Ties.
- Dimensions:** 3/4 inch (19mm) wide x 5 inches (125mm) long x 12 gage (2.7mm) thick
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Has 1/4 inch (6mm) clearance.
 - Requires two fasteners.
 - Not recommended for metal or wood stud over sheathing (Suggest DA210 Anchor Plate or DA213 Veneer Plate).
 - Not recommended when cavity contains rigid insulation (Suggest DA213 or DA210X Veneer Anchors).
 - Can adapt to Seismic Zones see Seismic Section.



DA210 VENEER ANCHOR SCREW ON PLATES

- Function:** Designed to anchor masonry to a structure.
Used with DA700 Triangular Ties or DA750 Trapezoid Ties.
- Dimensions:** 1-1/2 inches (37mm) wide Back Plate 6 inches (150mm) long 14 (1.9mm) or 12 (2.7mm) gage thick
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Has 1/4 inch (6mm) clearance.
 - Requires two fasteners.
 - Not recommended when cavity contains rigid insulation (Suggest DA213 or DA210X Veneer Anchor).
 - Can adapt to Seismic Zones see Seismic Section.




DA210X VENEER ANCHOR SCREW ON PLATES

- Function:** Designed to connect masonry veneer to metal stud framed structural backings.
Used with DA700 Series Triangular Ties.
- Dimensions:** Available in 14 gauge and measures 1 1/4" wide x 5" long, legs sized to accommodate 5/8", 3/4", 1", 1 1/2", 2", 2 1/2" and 3" insulation or sheathing.
- Finishes:** Mill galvanized and hot dip galvanized.
- Special Notes:**
- Requires two fasteners.
 - Can be used with or without rigid foam insulation.
 - Provides 3-3/4" of vertical tie adjustment to meet variations in the masonry coursing.




DA213 VENEER ANCHORS (PLATES AND PINTLES)

- Function:** Designed to anchor masonry to a structure accommodating rigid insulation up to and including 3 inches (75mm).
- Plate Dimensions:** 14 (1.9mm) or 12 (2.7mm) gage with leg to accommodate rigid insulation.
- Pintle Dimensions:** 3/16 inch (5mm) wire x 3 inches (75mm), 4 inches (100mm), 5 inches (125mm), 6 inches (150mm), or 7 inches (180mm) long.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Recommend two fasteners per plate.
 - Needs 3/4 inch (19mm) to 1 inch (25mm) minimum air cavity.
 - Can adapt Wire Pintle to Seismic Zones see Seismic Section.
 - For attachment to concrete, brick or block use DA5213.
 - Fully tested.

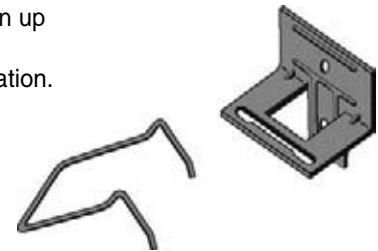


DA801 ADJUSTABLE SPEED SET VENEER ANCHORS

- Function:** Designed to anchor masonry to a structure.
- Plate Dimensions:** 14 (1.9mm) gage thick 1/2 inch (25mm) depth 3 inch (75mm) long
- Tri Tie Dimension:** 3/16 inch (5mm) wire x 3 inch (75mm), 4 inch (100mm), or 5 inch (125mm) lengths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Uses one fastener.
 - Anchor comes assembled with Triangular Tie in Plate.
 - For attachment to concrete, brick or block use DA5801.



DA807 METAL STUD VENEER SCREW

- Function:** Designed to fasten anchors to metal stud backing.
Dimensions: #10 - 16 x 1-1/2 (38mm) long or #12 - 14 x 2" (50mm) long.
Finishes: Copolymer coated for corrosion resistance.
Special Notes: Available with or without Neoprene Washer.



DA808 WOOD STUD VENEER SCREW

- Function:** Designed to fasten anchors to wood stud backing.
Dimensions: #9 Phillips Head, 1-5/8 inches (41mm) or 2-1/4 inches (57mm) long.
Finishes: Proprietary corrosion resistant coating.



DA995 STAINLESS STEEL SCREW

- Function:** Designed to fasten anchors to metal stud backing.
Dimensions: #12-14 x 1-1/2 inches (38mm) or 2 inches (50mm) long.
Finishes: Type 304 Stainless Steel with Case Hardened Carbon Steel Drill Point.
Special Notes: Screw is self-drilling and self-tapping with Neoprene Washer available for 2 inch (50mm) long screw.




DA5410 AND DA5610 MASONRY EXPANSION ANCHORS

- Function:** Designed to fasten anchors to concrete, CMU, brick, tile, and into mortar joints.
Dimensions: 7/16 inch (11mm) outside diameter x 2 inches (50mm) long.
Finishes: 1/4 - 20 NC Hex head bolt and washer of HDG Carbon Steel (DA5610) or Type 304 stainless steel (DA5410); Expansion Sleeve and Expander Cone of brass.
Special Notes: Sold as sets with anchors as in DA5213; DA5213S; DA5431; DA5801 and individually.



DA301Z MASONRY STRAP ANCHOR

- Function:** Various masonry applications.
Dimensions: Code required 1/4 inch (6mm) thick 1-1/2 inch (38mm) wide 24 inch (600mm) long with 2 inch (50mm) long, 90 degree bends on each end.
Finishes: Hot Dip Galvanized; or Stainless Steel.
Special Notes: Other dimensions and shapes available.



DA500 "Z" CAVITY WALL TIES

- Function:** Designed to tie multiwythe masonry walls when fully grouted.
Dimensions: 3/16 inch (5mm) wire with 2 inch (50mm) bends with various lengths between bends.
Finishes: Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
Special Notes: Provides no adjustability between wythes. For cavity drip use DA2100 Ins-O-Grips.



Ties, Anchors and Veneer Anchors

DA510 AND DA511 RECTANGULAR CAVITY WALL TIES

- Function:** Designed to tie multiwythe masonry walls.
- Dimensions:** DA510 3/16 inch (5mm) wire x 2 inch (50mm) wide with various lengths.
DA511 3/16 inch (5mm) wire x 4 inch (100 mm) wide with various lengths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Provides no adjustability between wythes.
 - For cavity drip use DA2100 Ins-O-Grips.



DA518 ADJUSTABLE RECTANGULAR CAVITY WALL TIE EYES


(Formerly known as DA515)

- Function:** Designed to tie multiwythe walls with adjustability between the wythes. Used with DA213 Wire Pintle.
- Dimensions:** 3/16 inch (5mm) wire x 2-3/4 inch (70mm), 4-3/4 inch (119mm), or 5-3/4 inch (144mm) lengths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Allows for only 1/16 inch (2mm) play when leg of pintle is engaged in eye.
 - Can adapt Wire Pintle to Seismic Zones, see Seismic Section.



DA601 COLUMN ANCHORS

- Function:** Designed to anchor block to steel column flanges.
- Dimensions:** 1/8 inch (3mm) thick x 2 inch (50mm) wide with 1 inch (25mm) right angle bend with various lengths.
- Finishes:** Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Requires two anchors, one for left and right hand side of flange.
 - Fully tested.

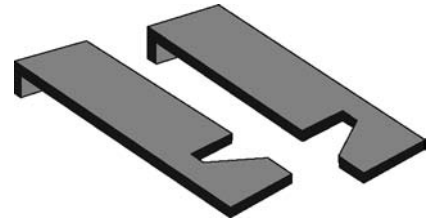


DA604 COLUMN ANCHORS

- Function:** Designed to anchor brick to steel column flanges.
- Dimensions:** 16 (1.5mm) gage thick x 1 inch (25mm) wide corrugated with various lengths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:**
- Requires two anchors one for each left and right hand side of flange.
 - Fully tested.



DA700 SERIES TRIANGULAR TIES

- Function:** Designed to anchor masonry to a structure. Used with DA207 MSSA Veneer Anchor Screw on Strap, DA210 Veneer Anchor Screw on Plate or DA709 Column Anchor Weld-on.
- Dimensions:** 3/16 inch (5mm) wire, 3 x 3 inches (75mm x 75mm), 4 x 4 inches (100mm x 100mm), 5 x 5 inches (125mm x 125mm), 6 x 6 inches (150mm x 150mm), 7 x 7 inches (180mm x 180mm), and 7 x 9 inches (180mm x 230mm).
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Can adapt for Seismic Zones, see Seismic Section.

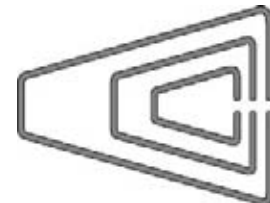

Ties, Anchors and Veneer Anchors


DA709 COLUMN ANCHOR WELD-ON

- Function:** Designed to anchor masonry to structural steel columns. Used with DA700 Series Triangular Ties or DA730 Trapezoid Ties.
- Dimensions:** 5/16 inch (8mm) rod x 5 inch (125mm) length.
- Finishes:** Brite or Plain Uncoated; Mill Galvanized; or Hot Dip Galvanized.




DA730 TRAPEZOID TIES (OR WEB TIES)

- Function:** Designed to anchor masonry to a steel structure from the end of the CMU using a wire anchor such as a DA709.
- Dimensions:** 3/16 inch (5mm) wire x 12 inch (300mm) overall length, 1" bends with various widths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Order by actual width of masonry unit being used.

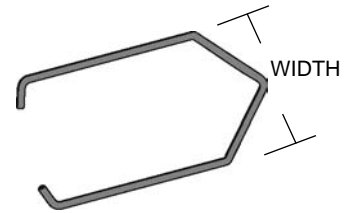


DA750 TRAPEZOID TIES (OR WEB TIES)

- Function:** Designed to anchor masonry to a structure from the end of the CMU using a strap anchor such as a DA207 or Plate Anchor such as DA210.
- Dimensions:** 3/16 inch (5mm) wire x 12 inch (300mm) overall length, 1" bends with various widths.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Order by actual width of masonry unit being used.

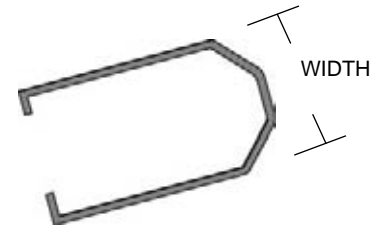


DA960 WIRE MESH TIES

- Function:** Variety of applications.
- Dimensions:** 1/2 inch x 1/2 inch (13mm x 13mm) mesh of 16 gage (1.5mm) wire in 3 inch (75mm) widths and various lengths.
- Finishes:** Hot Dip Galvanized.
- Special Notes:**
- Available in rolls of 100 feet (30.48M) length in either 36 inch (915mm) or 48 (1220mm) inch widths.
 - Other widths of Ties and Rolls available.



DA980 COLUMN FLANGE TIES

- Function:** F/P Style: Designed to anchor masonry to a steel column flange parallel to the flange. F/RP Style: Designed to anchor masonry to a steel column flange at a right angle to the flange.
- Dimensions:** 3/16 inch (5mm) wire with a 2 1/2 inch (64mm) hook with a 1/2 inch (13mm) opening in various lengths and a 2 inch (50mm) right angle bend.
- Finishes:** Mill Galvanized; Hot Dip Galvanized; or Stainless Steel.
- Special Notes:** Requires two anchors, one for left and right hand side of flange.

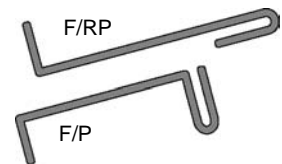

DA990 CORRUGATED WALL TIES

- Function:** Designed to anchor masonry to a structure or to tie multi wythe walls. Use in residential construction only.
- Dimensions:** 26 gage (0.45mm), 22 gage (0.76mm) or 16 gage (1.50mm) x 7/8 inch (22mm) wide x 7 inch (180mm) length.
- Finishes:** Mill Galvanized; Hot Dip Galvanized available in 26, 22 and 16 gages; and Stainless Steel available in 22 and 16 gages.
- Special Notes:** Other lengths and widths are available



Seismic Ties and Anchors

DA131 SEISMIC DOVETAIL ANCHORS

Function: Designed to anchor masonry to concrete with joint reinforcement in the veneer. Used with DA100 Dovetail Anchor Slot.

Dimensions: 16 gage (1.5mm), 14 gage (1.9mm), or 12 gage (2.7mm) x 1 inch (25mm) wide x 3-1/2 inch (90mm), 4-1/2 inch (113mm), 5-1/2 inch (138mm), or 6-1/2 inch (163mm) lengths (length does not include dovetail)
Dovetail measures 1 inch (25mm)

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Other lengths and thickness available.
- Has shear lugs to engage a piece of joint reinforcement either Seismic Ladur or Pencil Rod.



DA213 SEISMIC VENEER ANCHOR PLATES


Function: Designed to anchor masonry to a structure accommodating rigid insulation up to 3 inches (75mm) thick. Used with DA213 Seismic Pintles or DA213QT Lite Duty Seismic pintles.

Dimensions: 14 (1.9mm) or 12 (2.7mm) gage with leg to accommodate thickness of rigid insulation.

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Recommend two fasteners per plate.
- Needs 3/4 inch (19mm) to 1 inch (25mm) minimum air cavity.
- For attachment to concrete, block or brick see DA5213S.
- Fully tested.



DA213 S SEISMIC VENEER ANCHOR PINTLES

Function: Designed to anchor masonry to a structure accommodating rigid insulation with provision for holding joint reinforcement in the veneer. Used with DA213 Plates and DA519 Seismic Adjustable Eye Plates (Also Seismic Dur-O-Eye and Seismic Ladur-Eye).

Dimensions: 12 (2.7mm) and 11 (3mm) gage with 3-1/2 inch (90mm) and 4-1/2 inch (113mm) lengths 2 inches (50mm) wide with a 2 inch (50mm) bent leg.

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Other lengths available.
- Has shear lugs to engage a piece of joint reinforcement, either Seismic Ladur or Pencil Rod.



DA431 SEISMIC VENEER ANCHOR

Function: Designed to anchor masonry to a structure particularly effective when air cavity is more than 1 inch (25mm).

Dimensions: 14 (1.9mm) or 12 (2.7mm) gage x 1-1/4 inch (32mm) wide in 3-1/2 inch (90mm), 4-1/2 inch (113mm) and 5-1/2 inch (138mm) lengths.

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Has shear lugs to engage a piece of joint reinforcement, either Seismic Ladur or Pencil Rod.
- For attachment to concrete, brick or block see DA5431.
- Other lengths available.




DA519 ADJUSTABLE SEISMIC WALL EYE PLATES

Function: Designed to tie multiwythe masonry walls with adjustability between wythes and allows for joint reinforcement in the veneer. Used with DA213 Seismic Pintles.

Dimensions: 16 gage (1.5mm) plate with lengths to accommodate up to and including 3 inches of rigid insulation.

Finishes: Hot Dip Galvanized or Stainless Steel.



DA813 SEISMIC COMBS


Function: Designed to confine vertical bars at the ends of shear walls.

Dimensions: 3/16 inch (5mm) wire in a prescribed configuration of hooks for 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU walls. Width is approximately 1-1/4 inches (30mm) less than the thickness of the CMU.

Length is approximately three times the actual width of the wall.

Finishes: Hot Dip Galvanized.

Special Notes: • Meets requirements of most Building Codes.

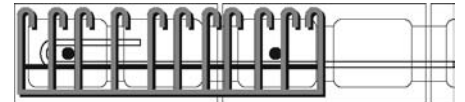


DA931 SEISMIC CHANNEL ANCHORS

Function: Designed to anchor masonry to a structure. Used with DA901, DA902, DA903, or DA904 Channel Anchor Slots.

Dimensions: 16 gage (1.5mm), 14 gage (1.9mm) or 12 gage (2.7mm) x 1 inch (25mm) wide x 3-1/2 inch (90mm), 4-1/2 inch (113mm) or 5-1/2 inch (138mm) lengths (length does not include Channel Anchor "T").

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes: • Has shear lugs to engage a piece of joint reinforcement, either Seismic Ladur or Pencil Rod.

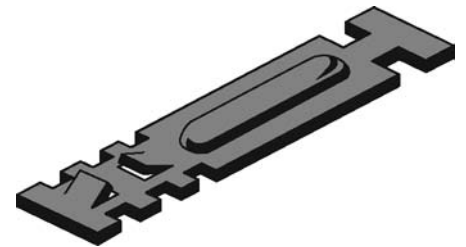

DA213QT LITE DUTY SEISMIC PINTLES

Function: Designed to anchor masonry to a structure with joint reinforcement in the veneer. Used with DA213 Veneer Anchor Plates, DA518 Adjustable Cavity Wall Eyes, Dur-O-Eye or Ladur-Eye.

Dimensions: 3/16 inch (5mm) wire x 3 inch (75mm), 4 inch (100mm), 5 inch (125mm), 6 inch (150mm), or 7 inch (180mm) lengths with welded Quake Tie (Lengths do not include the Quake Tie)

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes: • Has clip to engage a piece of joint reinforcement either Seismic Ladur or Pencil Rod.



DA700QT LITE DUTY SEISMIC TRIANGULAR TIES

Function: Designed to anchor masonry to a structure with joint reinforcement in the veneer. Used with DA207 MSSA Veneer Anchor Screw-on Straps, DA210 Veneer Anchor Screw-on Plates or DA709 Column Anchor Weld-on.

Dimensions: 3/16 inch (5mm) wire 3 x 3 inches (75mm x 75mm), 4 x 4 inches (100mm x 100mm), 5 x 5 inches (125mm x 125mm), 6 x 6 inches (150mm x 150mm), 7 x 7 inches (180mm x 180mm), and 7 x 9 inches (180mm x 230mm) with welded Quake Tie (Lengths do not include the Quake Tie).

Finishes: Hot Dip Galvanized or Stainless Steel.


Special Notes: • Has clip to engage a piece of joint reinforcement either Seismic Ladur or Pencil Rod.
• Quake Tie is welded in off-set position to enable Triangular Tie to be engaged to DA207, DA210, or DA709.



Seismic Ties and Anchors


DA720QT LITE DUTY SEISMIC DOVETAIL TRIANGULAR TIES

- Function:** Designed to anchor masonry to concrete. Used with DA100 Dovetail Anchor Slot.
- Dimensions:** 12 gage (2.7mm) Dovetail Clip with 3/16 inch (5mm) wire tie x 3-1/2 inch (90mm), 4-1/2 inch (113mm), 5-1/2 inch (138mm), 6-1/2 inch (163mm), 7-1/2 inch (193mm) and 9-1/2 inch (243mm) lengths with welded Quake Tie (lengths do not include Quake Tie).
- Finishes:** Hot Dip Galvanized or Stainless Steel.
- Special Notes:**
- Has shear lugs to engage a piece of joint reinforcement either Seismic Ladur or Pencil Rod.

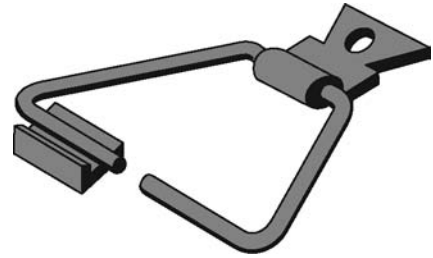


DA918QT LITE DUTY SEISMIC CHANNEL ANCHOR TRIANGULAR TIES

- Function:** Designed to anchor masonry to a structure. Used with DA901, DA902, DA903 or DA904 Channel Anchor slot.
- Dimensions:** 12 gage (2.7mm) Channel Anchor Clip with 3/16 inch (5mm) diameter wire tie x 3-1/2 inch (90mm), 4-1/2 inch (113mm), 5-1/2 inch (138mm), 6-1/2 inch (163mm), 7-1/2 inch (193mm) and 9-1/2 inch (243mm) lengths with welded Quake Tie (lengths do not include Quake Tie).
- Finishes:** Hot Dip Galvanized or Stainless Steel.
- Special Notes:**
- Has shear lugs to engage a piece of joint reinforcement either Seismic Ladur or Pencil Rod.

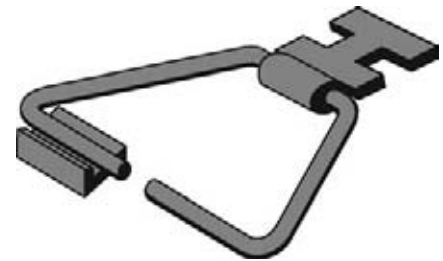


DA320S SEISMIC LADUR (Masonry Reinforcement for Veneers)

- Function:** Designed to provide greater ductility in veneers and is generally required in masonry veneers in seismic applications. Used for block or brick veneer applications.
- Dimensions:** 9 gage (3.7mm) wire for both side and cross rods
5/8 inch (15mm) out-to-out measurement
10 feet 8 inch (3760mm) length.
- Finishes:** Hot Dip Galvanized or Stainless Steel.
- Special Notes:**
- Is also available in 3/16 inch (5mm) wire for side rods and 9 gage (3.7mm) for cross rods.

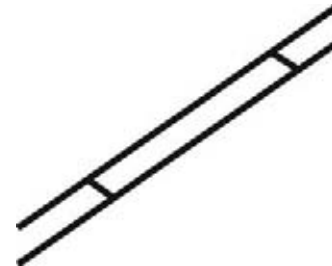

DA8706 PENCIL ROD DEFORMED (STRAIGHT AND CUT)

- Function:** Designed to provide greater ductility in veneers and is generally required in masonry veneers in seismic applications. Used as masonry reinforcement for brick veneers.
- Dimensions:** 9 gage (3.7mm) wire in 10 feet (3050mm) lengths.
- Finishes:** Hot Dip Galvanized or Stainless Steel.
- Special Notes:**
- Is deformed to comply with code requirements for joint reinforcement.

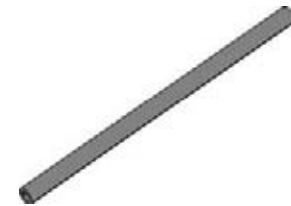

FASTENER NOTE:


Dur-O-Wal recommends the appropriate fastener be used when attaching veneer anchors to a structural backing. The following fasteners are recommended:

- Use stainless steel screws with stainless steel anchors.
- Use zinc corrosion protected screws with hot-dipped galvanized or mill galvanized anchors.
- Attach veneer anchors to cast-in-place concrete, precast concrete, hollow or solid concrete masonry units (CMU) using either the DA5410 or DA5610 Expansion Anchors.
- Attach veneer anchors to a steel stud or sheathing structural backing, using either the DA807 Steel Stud Veneer Anchor Screw or DA995 Stainless Steel Screw.
- Attach veneer anchors to wood stud and sheathing structural backing using the DA808 Wood Stud Screw.
- Never use nails to attach anchors.

Rebar Positioners and Other Products


DA810 REBAR POSITIONERS

- Function:** Designed to position rebar vertically in the cell of CMU.
- Dimensions:** 9 gage (3.7mm) wire for 6 inch (150mm), 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU.
- Finishes:** Mill Galvanized or Hot Dip Galvanized.
- Special Notes:** Will accommodate up to and including #7 rebar.

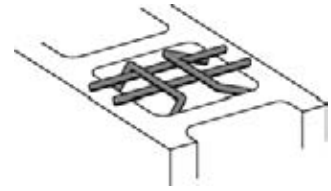


DA811 REBAR POSITIONERS

- Function:** Designed to position rebar vertically in cell of CMU.
- Dimensions:** 18 gage (1.2mm) steel for 8 inch (200mm) CMU ONLY
- Finishes:** Mill Galvanized or Hot Dip Galvanized.
- Special Notes:**
- Will accommodate up to and including #7 rebar.
 - Will position 2 bars.
 - Can be installed after rebar is positioned in cell.

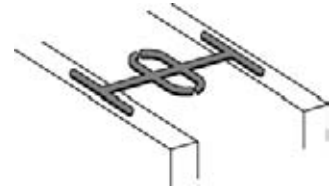


DA812 REBAR POSITIONERS

- Function:** Designed to position rebar horizontally in cell of CMU.
- Dimensions:** 9 gage (3.7mm) wire for 6 inch (150mm), 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU.
- Finishes:** Mill Galvanized or Hot Dip Galvanized.
- Special Notes:** Will accommodate up to and including #7 rebar.

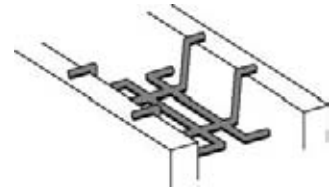


DA815 REBAR POSITIONERS

- Function:** Designed to position rebar vertically in cell of CMU.
- Dimensions:** 9 gage (3.7mm) wire with 18 gage (1.2mm) segments for 6 inch (150mm), 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU.
- Finishes:** Mill Galvanized or Hot Dip Galvanized.
- Special Notes:**
- Will accommodate up to and including #7 rebar.
 - Will position 2 bars.
 - Can be installed after rebar is positioned in cell.

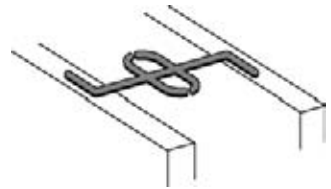


DA816 REBAR POSITIONERS

- Function:** Designed to position rebar vertically in cell of CMU.
- Dimensions:** 9 gage (3.7mm) wire with 18 gage (1.2mm) segments for 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU.
- Finishes:** Mill Galvanized or Hot Dip Galvanized.
- Special Notes:**
- Will accommodate up to and including #7 rebar.
 - Will position 4 bars.
 - Can be installed after rebar is positioned in cell.

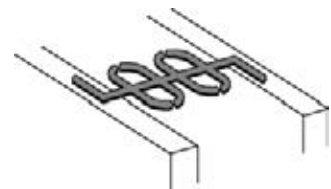

DA817 REBAR POSITIONERS

- Function:** Designed to position rebar vertically in cell of CMU.
- Dimensions:** 9 gage (3.7mm) wire for 8 inch (200mm), 10 inch (250 mm), and 12 inch (300mm) CMU.
- Finishes:** Mill Galvanized or Hot Dip Galvanized.
- Special Notes:**
- Will accommodate up to and including #8 rebar.
 - Will position 2 bars.
 - Can be installed after rebar is positioned in cell.

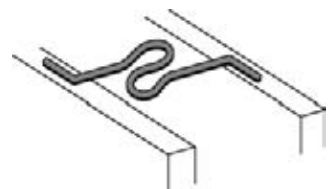


INSTALLATION NOTE FOR REBAR POSITIONERS

Bar positioners required by most Building Codes. Locate one positioner at top of first course, one course below top of wall and at intervals not exceeding 200 bar diameters

Rebar Positioners and Other Products


DA1010 FIL-STOP

- Function:** Designed to control loose fill insulation in block wall cells.
- Dimensions:** 10 TPI x 10 TPI Mesh in 150 feet (45.72M) rolls in 4 inch (100mm), 6 inch (150mm), 9 inch (230mm) and 12 inch (300mm) actual widths.
- Special Notes:** Fabricated from resin coated fiberglass.

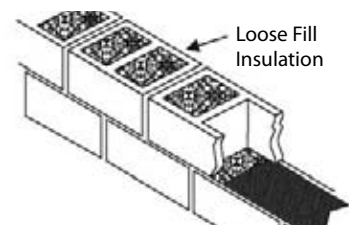

DA1015-DA1018 DUR-O-STOP

- Function:** Designed to prevent grout falling through while maintaining positive bond in mortar joint.
- Dimensions:** 1/2 inch x 1/2 inch (13mm x 13mm) mesh in 100 feet (30.48M) rolls for a 6 inch (150mm), 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) actual widths. Actual measurement is 2 inches less than the block in which it is installed.
- Special Notes:**
- Is corrosion proof and biologically inert.
 - Fabricated from monofilament screen of nylon.

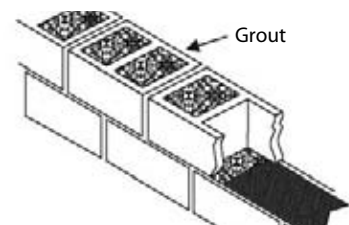

DA1020 DUR-O-FIBAR

- Function:** An additive to Portland Cement Plaster to control cracking in stucco.
- Dimensions:** 1/2 inch (13mm) fibers.
Pre-measured 1 pound (454g) bags.
Bulk packaged in 1,000 pounds (534kg).
- Special Notes:** This is an alkali-resistant (AR glass) additive.



DA2100 INS-O-GRIPS

- Function:** Designed to hold rigid insulation tight against backup and provide cavity drip.
- Special Notes:** Recommended for cavity drip instead of crimping or placing a "V" in the wire which weakens the steel.






























STONE ANCHORS

Function: Designed to anchor stone panels to a structure, these Anchors can support dead loads, resist live loads and accommodate movement of the building envelope relative to the structure.

Dimensions: There are no "standard" dimensions. Anchors are individually engineered, detailed and manufactured per project drawing.

Finishes: Brite or Plain Uncoated; Mill Galvanized; Hot Dip Galvanized; Stainless Steel

Special Notes: Quotes and fabrication are based on approved details containing all dimensions.

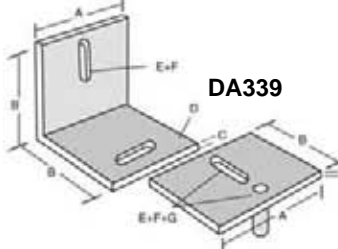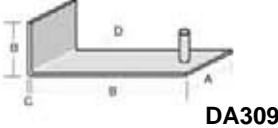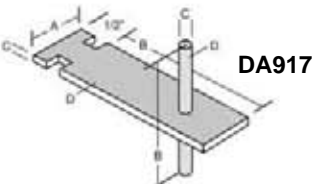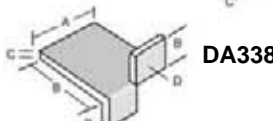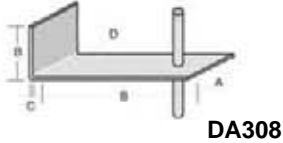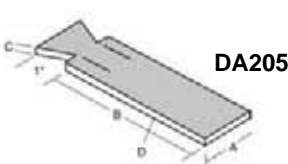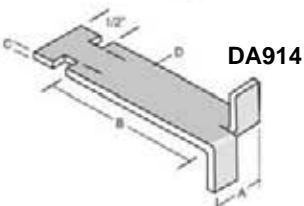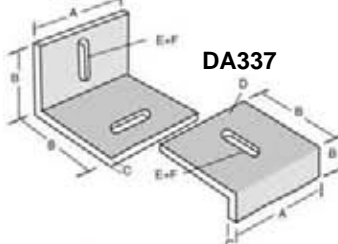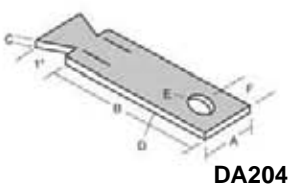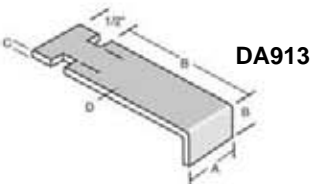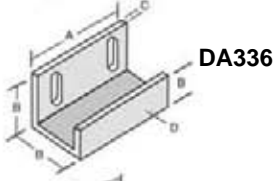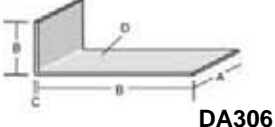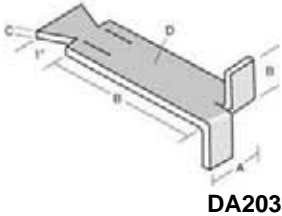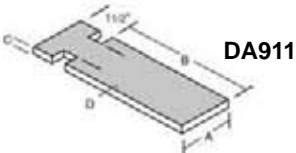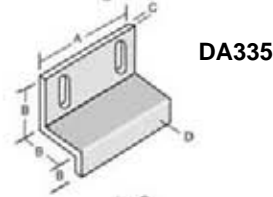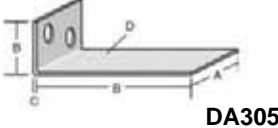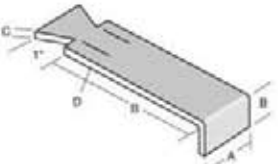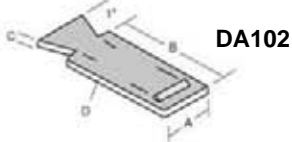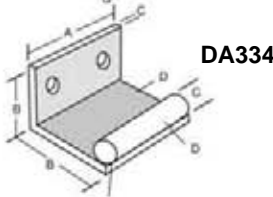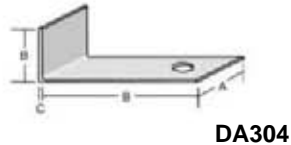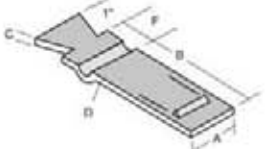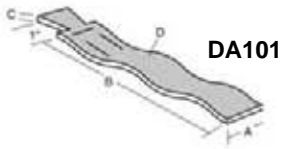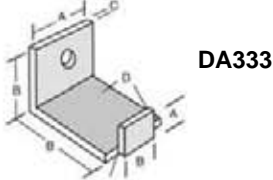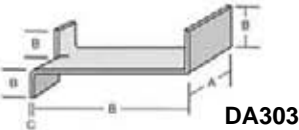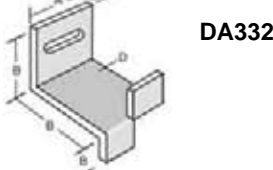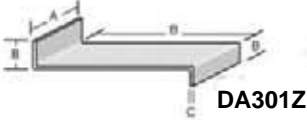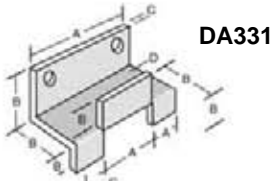


Movement Control Products

DA2001 REGULAR RUBBER CONTROL JOINT

Function: Designed to control movement in concrete masonry unit with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength, Elongation and Durometer meets ASTM D2000-08.
 - Recommend to be used in all exterior walls with backer rod and caulking/sealant.
 - Not recommended in fire-rated walls, unless used with ceramic insulation and fire resistant caulking.

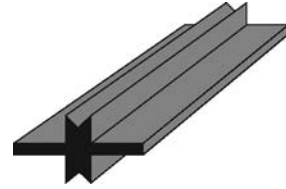


DA2003 #6 WIDE FLANGE RUBBER CONTROL JOINT

Function: Designed to control movement in concrete masonry unit with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength, Elongation and Durometer meets ASTM D2000-08.
 - Recommended to be used in interior walls.
 - Not recommended for use in fire-rated walls.

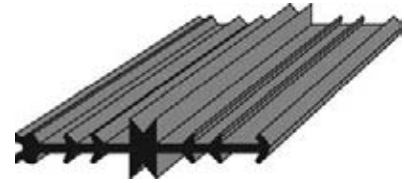


DA2005 #8 WIDE FLANGE RUBBER CONTROL JOINT

Function: Designed to control movement in concrete masonry unit with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength, Elongation and Durometer meets ASTM D2000-08.
 - For 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU
 - Recommended to be used in interior walls.
 - Not recommended for use in fire-rated walls.

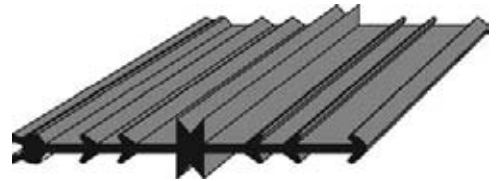


DA2025 RAPID "T" RUBBER CONTROL JOINT

Function: Designed to control movement in concrete masonry unit with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength, Elongation and Durometer meets ASTM D638-08.
 - Has shear key only on one side of flange.
 - Not recommended for use in fire-rated walls unless used with ceramic insulation and fire resistant caulking.

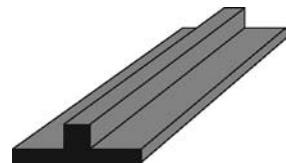


DA2002 REGULAR PVC CONTROL JOINT

Function: Designed to control movement in concrete masonry unit with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength and Elongation meets ASTM D638-08.
 - Durometer is in accordance with ASTM D2240-05.
 - Recommend to be used in all exterior walls with backer rod and caulking/sealant.
 - PVC not recommended for use in fire-rated walls unless used with ceramic insulation and fire resistant caulking.

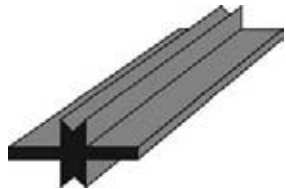


DA2004 6 WIDE FLANGE PVC CONTROL JOINT

Function: Designed to control movement in concrete masonry unit with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength and Elongation meets ASTM D638-08.
 - Durometer is in accordance with ASTM D2240-05.
 - Recommended to be used in interior walls.
 - Not recommended in fire-rated walls.

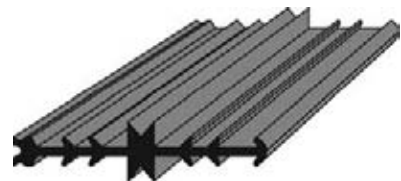


DA2006 #8 WIDE FLANGE PVC CONTROL JOINT

Function: Designed to control movement in concrete masonry with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength and Elongation meets ASTM D638-08.
 - Durometer is in accordance with ASTM D2240-05.
 - For 8 inch (200mm), 10 inch (250mm) and 12 inch (300mm) CMU's.
 - Recommended to be used in interior walls.
 - Not recommended in fire rated walls.

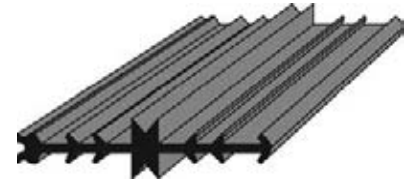

DA2007 #12 WIDE FLANGE PVC CONTROL JOINT

Function: Designed to control movement in concrete masonry with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength and Elongation meets ASTM D638-08.
 - Durometer is in accordance with ASTM D2240-05.
 - Has an offset shear key.
 - Not recommended in fire rated walls.




DA2020 RAPID "T" PVC CONTROL JOINT

Function: Designed to control movement in concrete masonry with standard sash block end.

Dimensions: Each piece in 32 (810mm) or 48 inch (1220mm) lengths, black color.

- Special Notes:**
- Tensile Strength and Elongation meets ASTM D638-08.
 - Durometer is in accordance with ASTM D2240-05.
 - Has shear key only on one side of flange.
 - Not recommended in fire rated walls, unless used with ceramic insulation and fire resistant caulking.

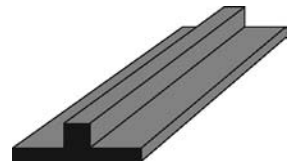

DA2010 RAPID SOFT JOINT

Function: Designed to keep mortar and other debris outside of horizontal joints, generally under shelf angles, to allow for brick expansion.

Dimensions: 1/4 inch (6mm) thick x 2 3/4 inch (70mm) wide x 50 feet (15.24M) rolls. Other thickness and widths available.

- Special Notes:**
- Closed cell neoprene rubber.
 - Adhesive on one side with a release coated disposable backing paper.
 - Meets ASTM D1056-00, Class RE41 or 2A1.



DA2015 RAPID EXPANSION JOINT

Function: Designed to keep mortar and other debris outside of vertical joints to allow for brick expansion.

Dimensions: 3/8 inch (10mm) thick x 3 inch (75mm) wide x 50 feet (15.24M) rolls. Other thickness and widths available.

- Special Notes:**
- Closed cell neoprene Rubber.
 - Meets ASTM D1056-00, Class RE41 or 2A1.



DA2200 JOINT STABILIZING ANCHOR

Function: Designed to allow movement at expansion, contraction or isolation joints in masonry while maintaining the wall alignment in a direction normal to the movement.

Dimensions: 1/32 inch (1mm) sheet steel sleeves and two 8 gage (4mm) wires.

- Finishes:**
- Mill Galvanized and Stainless Steel.



DA411 WALL TOP STABILIZING ANCHOR

Function: A mechanical anchor designed to resist lateral loads at the top of masonry walls and allow for live load vertical deflection.

Dimensions: 3/8 inch x 6 inch (10mm x 150mm) steel dowel vertically welded to 12 gage (2.7mm) steel plate.

Finishes: Hot Dip Galvanized.

- Special Notes:**
- Concealed within a partition wall with no exposed hardware. Installed by welding or with mechanical anchors, such as DUR-O-WAL Expansion Anchor fasteners in concrete.



Moisture Control Products

DA1501 DCF THRU-WALL FLASHING

Function: Designed as thru-wall flashing for masonry walls.
Dimensions: 300 feet (91.4M) Rolls available in 12 inch (300mm), 16 inch (400mm), 18 inch (457mm), 24 inch (600mm), 36 inch (915mm) and 48 inch (1220mm) widths.

Special Notes:

- Composite flashing of vinyl ethylene film bonded to a fiber glass reinforcement.
- Recommend use of mastic to seal edges, splices and cover punctures.



DA1502 DCF FLASHING TAPE

Function: Designed to attach flashing to substrate, to repair and seal punctures or perforations and for splices.

Dimensions: 2 inch (50mm) wide x 108 feet (32.9M) rolls.



DA1505 COPPER FABRIC THRU-WALL FLASHING

Function: Designed as thru-wall flashing for masonry walls.
Dimensions: 25 feet (7.6M) rolls in 3, 5 and 7 ounce copper available in 12 inch (300mm), 16 inch (400mm), 18 inch (457mm), 24 inch (600mm), 32 inch (810mm), and 36 inch (915mm) widths.

Special Note:

- Copper sheet is asphalt coated on both sides and bonded between two layers of high tensile fiberglass fabric.



DA1506 COPPER KRAFT DUPLEX FLASHING

Function: Designed flashing for concealed roof flashing and for vapor barrier and slab on grade.

Dimensions: 60 feet (18.2M) rolls in 3, 5 and 7 ounce copper available in 12 inch (300mm), 16 inch (400mm), 18 inch (457mm), 24 inch (600mm), and 36 inch (915mm) widths.

Special Note:

- Copper sheet is laminated under high pressure with one layer of asphalt saturated with 60 pound kraft paper on each side.
- 7 oz. available on Special Order - subject to minimum quantities.



DA1507 COPPER COATED THRU-WALL FLASHING

Function: Designed as thru-wall flashing for masonry walls.

Dimensions: 25 feet (7.6M) rolls in 3, 5 and 7 ounce copper with various widths.

Special Note:

- Copper sheet is coated on both sides with a polymer modified asphalt compound.
- Special Order: subject to minimum quantities.



DA1508 PVC SHEETING

Function: Designed as a concealed waterproofing membrane on foundation walls and under concrete slabs.

Dimensions: 150 feet (45.7M) rolls in 20 mil and 30 mil available in 12 inch (300mm), 16 inch (400mm), 18 inch (457mm), 24 inch (600mm), and 36 inch (915mm) and 48 inch (220mm) widths.

Special Note: Not recommended or endorsed for use as above grade thru-wall flashing.



DA1540 POLY-BARRIER THRU-WALL FLASHING

- Function:** Designed as thru-wall flashing for masonry walls.
- Dimensions:** 50 feet (15.2M) rolls in 40 mil (32 mil rubberized asphalt plus 8 mil polyethylene film) available in 12 inch (300mm), 16 inch (406mm), 18 inch (457mm), 24 inch (600mm) and 36 inch (915mm) width.
- Special Notes:**
- Self-sealing, self-healing, fully-adhered composite flexible flashing.
 - Recommend Drip Edge Stainless Steel Flashing be used.




DA1544 DUR-O-BARRIER THRU-WALL FLASHING

- Function:** Designed as thru-wall flashing for masonry walls.
- Dimensions:** 75 feet (22.8M) rolls in 44 mil (32 mil rubberized asphalt plus 12 mil polyethylene sheet) available in 12 inch (300mm), 18 inch (457mm), 24 inch (600mm) and 36 inch (915mm) width.
- Special Notes:**
- Self-sealing, self-healing, fully-adhered composite flexible flashing.
 - Recommend Drip Edge Stainless Steel Flashing be used.




DA1510 TERMINATION BAR

- Function:** Designed to attach flashing to a backing.
- Dimensions:** 1/8 inch (3mm) thick x 1 1/2 inch (38mm) wide x 8 feet (2440mm) lengths with holes at 8 inches (200mm) on center.
- Finishes:** Stainless Steel.
- Special Notes:** Hole size is 5/16 inch (8mm) diameter.

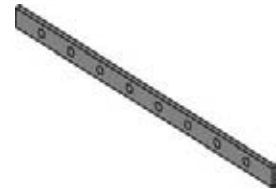

DA1525 DRIP EDGE FLASHING

- Function:** Designed as a moisture barrier to use with thru-flashing such as DCF Flashing, Copper Flashing, Dur-O-Barrier and Poly Barrier.
- Dimensions:** 26 gage (0.45mm) x 8 feet (2440mm) lengths x 1-1/2 inch (38mm) wide with 3/8 inch (10mm) closed hemmed edge
- Finishes:** Stainless Steel.
- Special Notes:** Full Drip Edge wide enough to bridge the length of the horizontal leg of the lintel or shelf angle is available with hemmed edge only.

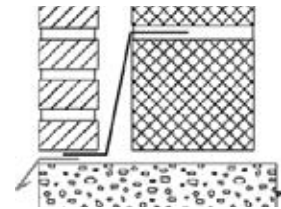


DA1005 WEEP HOLES OR TUBES

- Function:** Designed to be placed in head joints to allow air to enter cavity.
- Dimensions:** 3/8 inch (10mm) outside diameter in 4 inch (100mm) and 8 inch (200mm) lengths of clear plastic.
- Special Notes:**
- Weep holes are subject to clogging with mortar droppings, silt and bugs.
 - Recommend cavity contain mortar dropping control devices and cell vents.



DA1006 CELL VENTS


- Function:** Cell vent consists of many small adjacent passageways bonded together in one unit. Cellular composition provides easy drainage for moisture along the full height of the head joint. Recommended for use in course directly on top of flashing.
- Dimensions:** Standard 3/8 inch x 2-1/2 inches x 3-3/8 inches (10mm x 64mm x 85mm).
Jumbo 3/8 inch x 3-5/8 inches x 3-5/8 inches (10mm x 92mm x 92mm).
- Special Notes:**
- Available in Clear, Almond, Black, Brown, Cocoa, Gray and White.
 - Recommend cavity contain mortar dropping control devices.

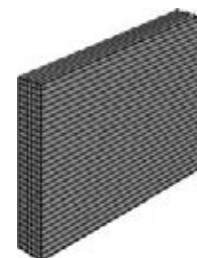

Moisture Control Products


DA1007 MOR-CONTROL

- Function:** Designed to control mortar droppings to insure clear air spaces in cavity walls.
- Dimensions:** 16 inch (400mm) length to accommodate 1 inch (25mm), 1-1/2 inch (38mm) and 2 inch (50mm) air cavities.
- Special Notes:**
- Fabricated from white corrugated poly-propylene co-polymer plastic in white.

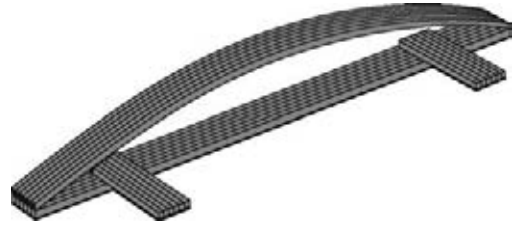


DA1008 MORTAR NET™

- Function:** Designed to control mortar droppings to insure clear air spaces in cavity walls.
- Dimensions:** 10 inch (250mm) wide x 5 feet (1.5M) lengths to accommodate 1 inch (25mm) and 2 inch (50mm) air cavities.
- Special Notes:**
- 1" width fabricated from either high density polyethylene or 100% polyester. 2" width manufactured from 50% recycled polyester.

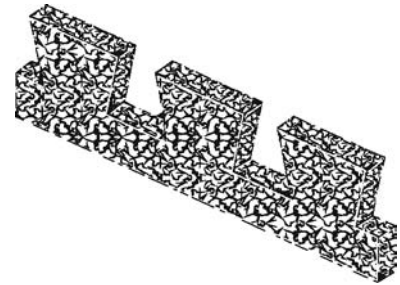

DA1009 MORTAR-STOP™

- Function:** Designed to control mortar droppings to insure clear air spaces in cavity walls.
- Dimensions:** 10 inch (250mm) wide 50 feet (15.2M) lengths to accommodate any air cavity.
- Special Notes:**
- Fabricated from high density polyethylene.

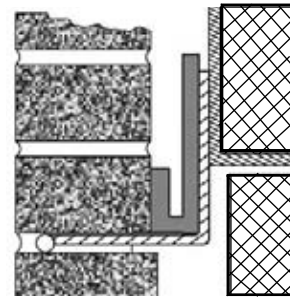

DA2016 DUR-O-BARRIER TAPES

- Function:** Designed to be placed between sheathing and veneer anchor plates or straps to minimize moisture penetration.
- Dimensions:** 4 inch (100mm) wide x 100 feet (30.4M) rolls.
- Special Notes:**
- Has a release coated disposable backing.



DA3200 LADUR JOINT REINFORCEMENT

Function: Designed to reinforce glass block masonry by placement in horizontal mortar joint.

Dimensions (1): 9 gage (3.7mm) wire for side and cross rods.
#3 measures 1-5/8 inches (46mm) out-to-out.
#4 measures 2 inches (50mm) out-to-out.
Cross Rods spaced 16 inches (400mm) on center.
10 feet 8 inch (3760mm) length.

Dimensions (2): 9 gage (3.7mm) wire for side and cross rods.
#3 measures 1-5/8 inches (46mm) out-to-out.
#4 measures 2 inches (50mm) out-to-out.
Cross Rods spaced 8 inches (200mm) on center.
10 feet (3050mm) length.

Dimensions (3): 9 gage (3.7mm) wire for side and cross rods.
#3 measures 1-5/8 inches (46mm) out-to-out.
#4 measures 2 inches (50mm) out-to-out.
Cross Rods spaced 8 inches (200mm) on center 48 inch (1220mm) length.

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Mill Galvanized is not recommended for glass block masonry construction.



DA1070 GLASS BLOCK PANEL ANCHORS


Function: Designed to anchor glass block to adjacent structure.

Dimensions: 20 gage (0.91mm) x 1-3/4 inches x 24 inches (44mm x 600mm) perforated steel strip.

Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Mill Galvanized is not recommended for glass block masonry construction.

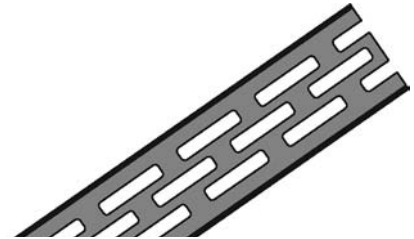

DA8706 PENCIL ROD SMOOTH (STRAIGHT AND CUT)


Function: Designed for vertical reinforcement in glass block masonry construction.

Dimensions: 1/4 inch (6mm) smooth wire in 10 feet (3050mm) lengths


Finishes: Hot Dip Galvanized or Stainless Steel.

Special Notes:

- Mill Galvanized is not recommended for glass block masonry construction.

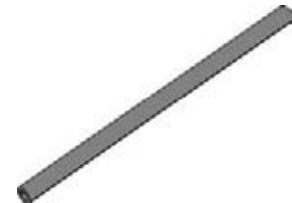


Single Wythe Systems

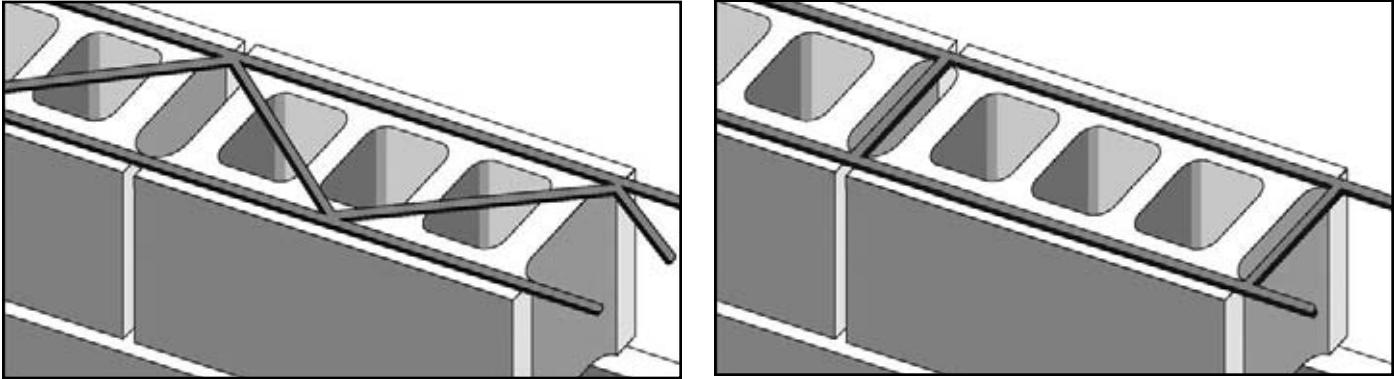

DUR-O-WAL SINGLE WYTHE SYSTEMS DA3100 TRUSS AND DA3200 LADUR


- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3100 Truss or DA3200 Ladur types.
- Basic Uses:**
- To control shrinkage cracking.
 - To bond intersection walls.
 - To provide principal steel in engineered masonry walls.
 - To reinforce stack bond masonry.
- Dimensions:**
- Out-to-out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the wythe or wall in which the reinforcement is to be placed.
 - Truss is provided in 10 feet (3050mm) lengths with Cross Rods welded 16 inches (400mm) on center.
 - Ladur is provided in 10 feet 8 inch lengths (3250mm) with Cross Rods welded 16 inches (400mm) on center [15 inches (380mm) on center is available in 10 feet (3050mm) lengths].
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (3.7mm) Cross Rods.
 - Extra Heavy Weight 3/16 inch (5mm) Side rod and 9 gage (3.7mm) Cross Rods.
 - Super Heavy Weight 3/16 inch (5mm) Side rods and 3/16 inch (0.187 or 5mm) Cross Rods.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Always check local building codes for requirements.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:** Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 32 inches (810mm).

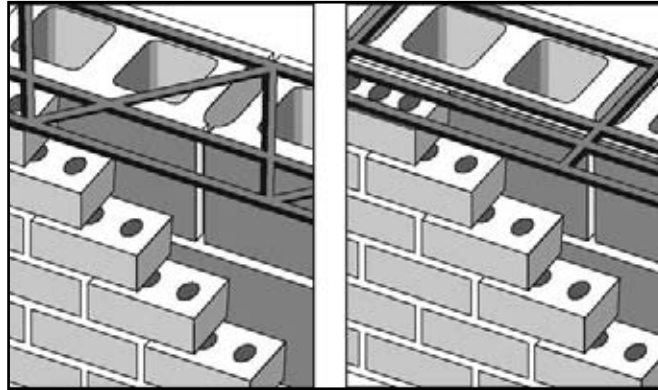

DUR-O-WAL MULTI-WYTHE NON-ADJUSTABLE SYSTEMS DA3100TR TRUSS TRIROD, DA3100DSR TRUSS DOUBLE SIDE ROD, DA3200TR LADUR TRIROD AND DA3200DSR LADUR DOUBLE SIDE ROD

- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3100 Truss or DA3200 Ladur types.
- Basic Uses:**
- To control shrinkage cracking.
 - To bond intersection walls.
 - To provide principal steel in engineered masonry walls.
 - To reinforce stack bond masonry.
 - Ties multiwythe masonry walls.
 - Trirod provides 2 side rods in backing and 1 side rod in veneer wall.
 - Double Side Rod provides 2 side rods in backing and 2 side rods in veneer.
- Dimensions:**
- Out-to-out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the wythe or wall in which the reinforcement is to be placed.
 - Truss is provided in 10 feet (3050mm) lengths with Cross Rods welded 16 inches (400mm) on center.
 - Ladur is provided in 10 feet 8 inch lengths (3250mm) with Cross Rods welded 16 inches (400mm) on center [15 inches (380mm) on center is available in 10 feet (3050mm) lengths].
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (3.7mm) Cross Rods.
 - Extra Heavy Weight 3/16 inch (5mm) Side rod and 9 gage (3.7mm) Cross Rods.
 - Super Heavy Weight 3/16 inch (5mm) Side rods and 3/16 inch (0.187 or 5mm) Cross Rods.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Always check local building codes for requirements.
 - Multiwythe walls are considered exterior applications and should be Stainless Steel or Hot Dip Galvanized.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:**
- Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 32 inches (810mm) and Corners must be designated as Outside or Inside Corners.
 - DUR-O-WAL does not recommend Truss Trirod or Truss Double Side Rod in insulated cavity walls due to differential movement.
 - Trirod and Double Side Rod should only be used when the wythes course out.


Multi-Wythe Systems

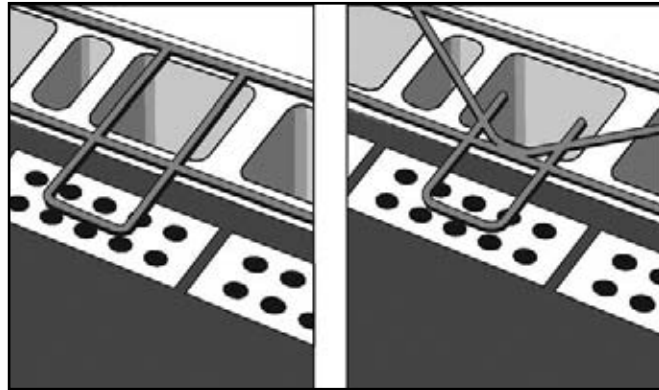

DUR-O-WAL MULTIWYTHE NON-ADJUSTABLE SYSTEMS DA3500 DUR-O-TAB AND DA3400 CONTINUOUS RECTANGULAR TAB TIE (CRT)

- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3500 Dur-O-Tab or DA3400 CRT types.
- Basic Uses:**
- To control shrinkage cracking.
 - To bond intersection walls.
 - To provide principal steel in engineered masonry walls.
 - To reinforce stack bond masonry.
 - Ties multiwythe masonry walls.
 - Welded rectangular tabs on the side rods of the Truss design DA3500 Dur-O-Tab or Ladur design DA3200 CRT are embedded in the veneer.
- Dimensions:**
- Out-to-out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the backing and the overall width of the assembly should be such that the tab tie extends at least 1-1/2 inches (38mm) into the outer wythe.
 - Standard length is 10 feet (3050mm) with the rectangular tabs welded at 16 inches (400mm) on center.
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (3.7mm) Cross Rods.
 - Extra Heavy Weight 3/16 inch (5mm) Side rod and 9 gage (3.7mm) Cross Rods.
 - Super Heavy Weight 3/16 inch (5mm) Side rods and 3/16 inch (0.187 or 5mm) Cross Rods.
 - Rectangular Tabs are fabricated from 3/16 inch (5mm) wire.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Multiwythe walls are considered exterior applications and should be Stainless Steel or Hot Dip Galvanized.
 - Always check local building codes for requirements.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:**
- Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 32 inches (810mm) and Corners must be designated as Outside or Inside Corners.
 - Dur-O-Tab and CRT should only be used when the wythes course out.


Multi-Wythe Adjustable Systems

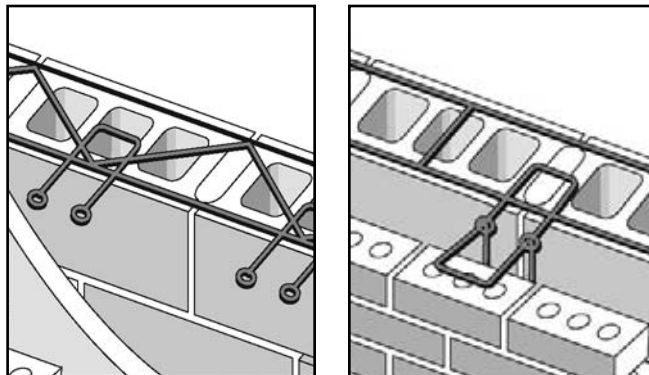

DUR-O-WAL MULTI-WYTHE ADJUSTABLE SYSTEMS DA3700 DUR-O-EYE AND DA3600 LADUR-EYE


- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3700 Dur-O-Eye or DA3600 Ladur-Eye types.
- Basic Uses:**
- Provides same uses as single wythe walls.
 - Ties multiwythe masonry walls.
 - Welded eyes on the side rods of the Truss design DA3700 Dur-O-Eye or Ladur design DA3600 Ladur-Eye engage pintles to tie the wythes with adjustability between wythes.
- Dimensions:**
- Out-to-out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the backing and the overall width of the assembly should be such that the engaged pintles extend at least 1-1/2 inches (38mm) into the outer wythe.
 - Maximum play between Pintle engaged in Eye is 1/16 inch (2mm).
 - Pintle leg allows for a misalignment of 1-1/4 inches (30mm).
 - Standard length is 10 feet (3050mm) with the Eyes welded at 16 inches (400mm) on center.
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (3.7mm) Cross Rods.
 - Extra Heavy Weight 3/16 inch (5mm) Side rod and 9 gage (3.7mm) Cross Rods.
 - Super Heavy Weight 3/16 inch (5mm) Side rods and 3/16 inch (0.187 or 5mm) Cross Rods.
 - Eyes and Pintles are fabricated from 3/16 inch (5mm) wire.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Multiwythe walls are considered exterior applications and should be Stainless Steel or Hot Dip Galvanized.
 - Always check local building codes for requirements.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:**
- Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 32 inches (810mm) and Corners must be designated as Outside or Inside Corners.
 - Pintles can be installed either up or down.
 - 2-1/2" maximum misalignment between courses which will meet the code requirements.
 - These same guidelines apply to DUR-O-WAL's In Line Ladur-Eye to utilize its advantages.

Seismic Joint Reinforcement

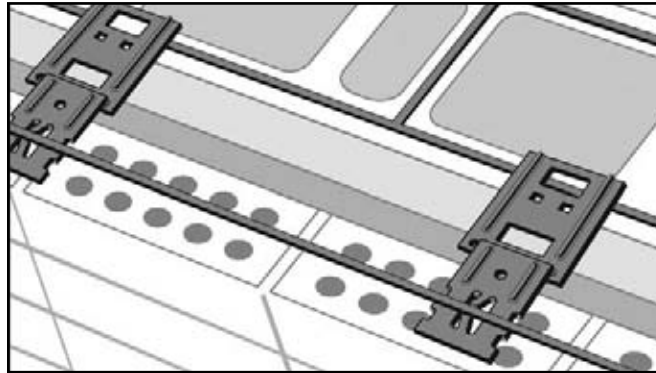

DUR-O-WAL SEISMIC JOINT REINFORCEMENT DA3700S SEISMIC DUR-O-EYE AND DA3600S HEAVY DUTY SEISMIC LADUR-EYE


- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3700S Dur-O-Eye or DA3600S Seismic Ladur-Eye types
- Basic Uses:**
- Provides same uses as single wythe walls.
 - Ties multiwythe masonry walls in seismic applications.
 - Welded eye plates on the side rods of the Truss design DA3700S Seismic Dur-O-Eye or Ladur design DA3600S Seismic Ladur-Eye engage Seismic Pintles to tie the wythes with adjustability between wythes.
- Dimensions:**
- Out-to-out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the backing and the overall width of the assembly should be such that the engaged Seismic Pintles extend at least 1-1/2 inches (38mm) into the outer wythe.
 - Seismic Pintle leg allows for a misalignment of 1-1/4 inches (30mm).
 - Standard length is 10 feet (3050mm) with the Eyes Plates welded at 16 inches (400mm) on center.
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (3.7mm) Cross Rods.
 - Extra Heavy Weight 3/16 inch (5mm) Side rod and 9 gage (3.7mm) Cross Rods.
 - Super Heavy Weight 3/16 inch (5mm) Side rods and 3/16 inch (0.187 or 5mm) Cross Rods.
 - Eyes Plates are fabricated from 16 gage (1.5mm) sheet steel.
 - Seismic Pintles are fabricated from either 12 gage (2.7mm) or 11 gage (3.0mm) sheet steel.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Multiwythe walls are considered exterior applications and should be Stainless Steel or Hot Dip Galvanized.
 - Always check local building codes for requirements.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:**
- Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 32 inches (810mm) and Corners must be designated as Outside or Inside Corners.
 - Seismic Pintles can be installed either up or down 2-1/2" maximum misalignment between courses which will meet the code requirements.
 - Shear Lugs at the end of the Seismic Pintle engage a piece of joint reinforcement or pencil rod.

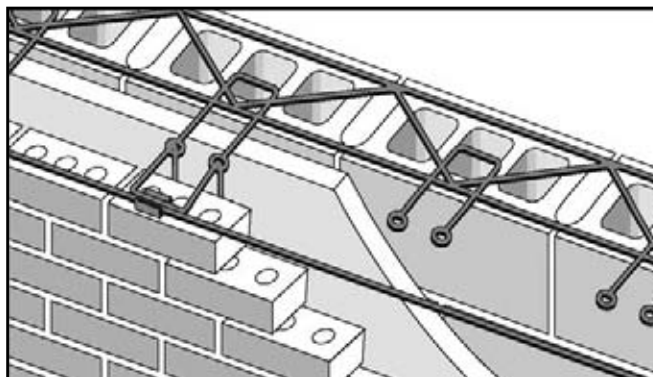

DUR-O-WAL SEISMIC JOINT REINFORCEMENT DA3700ES LITE DUTY SEISMIC DUR-O-EYE DA3600ES LITE DUTY SEISMIC LADUR-EYE

- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3700ES Lite Duty Seismic Dur-O-Eye or DA3600ES Lite Duty Seismic Ladur-Eye types.
- Basic Uses:**
- Provides same uses as single wythe walls.
 - Ties multiwythe masonry walls.
 - Welded eyes on the side rods of the Truss design DA3700ES Lite Duty Seismic Dur-O-Eye or Ladur design DA3600ES Lite Duty Ladur-Eye engage pintles to tie the wythes with adjustability between wythes.
- Dimensions:**
- Out to out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the backing and the overall width of the assembly should be such that the engaged pintles extend at least 1-1/2 inches (38mm) into the outer wythe.
 - Maximum play between engaged pintle in Eye is 1/16 inch (2mm).
 - Pintle leg allows for a misalignment of 1-1/4 inches (30mm).
 - Standard length is 10 feet (3050mm) with the Eyes welded at 16 inches (400mm) on center.
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (3.7mm) Cross Rods.
 - Extra Heavy Weight 3/16 inch (5mm) Side rod and 9 gage (3.7mm) Cross Rods.
 - Super Heavy Weight 3/16 inch (5mm) Side rods and 3/16 inch (0.187 or 5mm) Cross Rods)
 - Eyes and pintles are fabricated from 3/16 inch (5mm) wire.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Multiwythe walls are considered exterior applications and should be Stainless Steel or Hot Dip Galvanized.
 - Always check local building codes for requirements.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:**
- Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 32 inches (810mm) and Corners must be designated as Outside or Inside Corners.
 - Pintles can be installed either up or down 2-1/2" total for adjustment between courses, which will meet the code requirements allowing for 2-1/2" maximum misalignment between courses.
 - Welded Quake Tie at end of pintle engages a piece of joint reinforcement or pencil rod.

Seismic Joint Reinforcement

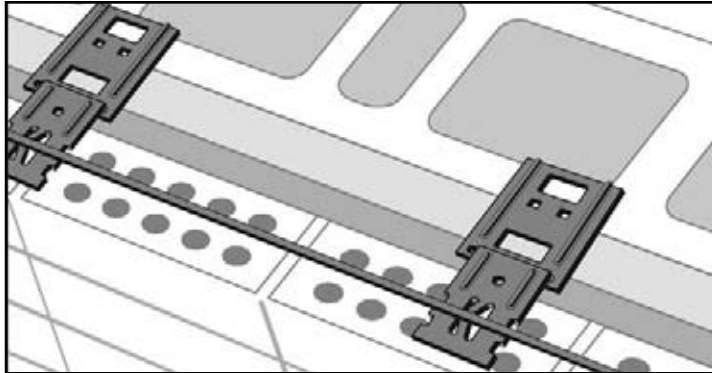

DUR-O-WAL SEISMIC JOINT REINFORCEMENT DA8706 PENCIL ROD DEFORMED (STRAIGHT AND CUT)

Function: Prefabricated reinforcement designed for embedment in the horizontal mortar joints of veneer walls.

Basic Uses:

- To control shrinkage cracking.
- To provide greater ductility in veneers.


Dimensions: Deformed 10 feet (3050mm) lengths.

Wire Gages: Standard Weight 9 gage (3.7mm) Extra Heavy Weight 3/16 inch (or 5mm).

Finishes: Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel
DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications including veneers.
Always check local building codes for requirements.

Advantages: Tests show continuous reinforcement improves masonry wall performance by providing:


- Better crack distribution under seismic loads.
- High bond because of the deformations.

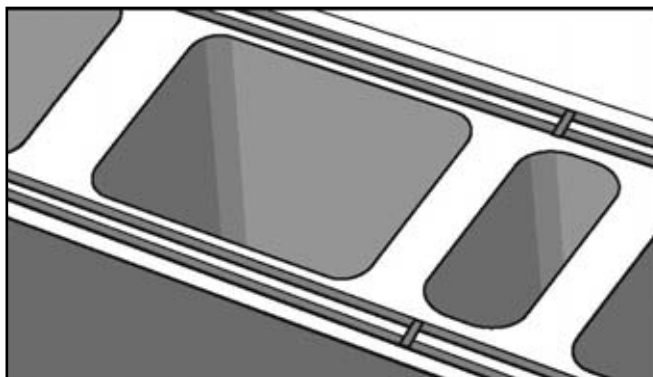

DA3200S SEISMIC LADUR JOINT REINFORCEMENT

- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls.
- Basic Uses:**
- To control shrinkage cracking.
 - To bond intersection walls.
 - To provide principal steel in engineered masonry walls.
 - To reinforce stack bond masonry.
 - To provide greater ductility in veneers.
- Dimensions:** 5/8 inch (15mm) out-to-out measurement 10 feet 8 inch (3760mm) length.
- Wire Gages:**
- Standard Weight 9 gage (3.7mm) Side Rods and 9 gage (or 3.7mm) cross rods.
 - Extra Heavy Weight 3/16 inch (or 5mm) Side rods and 9 gage (or 3.7mm) cross rods.
 - Super Heavy Weight 3/16 inch (or 5mm) Side rods and 3/16 inch (or 5mm) cross rods
- Finishes:** Hot Dip Galvanized or Stainless Steel.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Better crack distribution under seismic loads.
 - Greater elasticity.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
 - Installation ease by allowing joint reinforcement to be placed on either side of vertical rods in block veneers.
- Special Notes:** Seismic Ladur is generally the recommended joint reinforcement in block veneers and in veneers wider than 4" nominal.

Random/Rubble Stone System

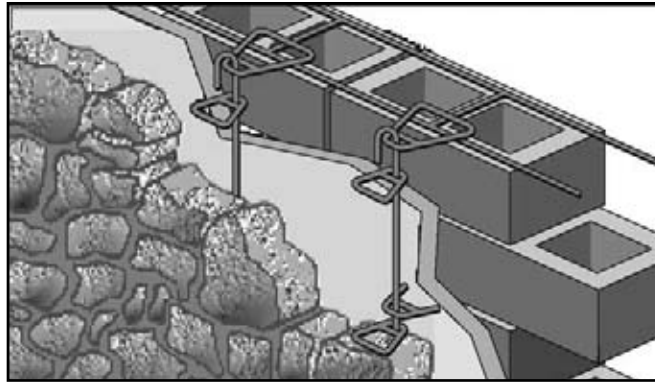

DUR-O-WAL RANDOM/RUBBLE STONE SYSTEM DA3300SL ADJUSTABLE DUR-O-TAB WITH RESTRAINT BAR DA3000SL ADJUSTABLE RECTANGULAR TAB TIE WITH RESTRAINT BAR (CRT) J-BARS AND DA700WB SERIES TRIANGULAR TIES WITH RESTRAINT BAR

- Function:** Prefabricated reinforcement designed for embedment in the horizontal mortar joints of masonry walls in either DA3300SL Dur-O-Tab or DA3000SL CRT types.
- Basic Uses:**
- Provides same uses as single wythe walls.
 - Ties multiwythe block wall to random/rubble stone veneer.
 - Triangular tabs with restraint bars are welded on the side rods of the Truss design DA3300SL Dur-O-Tab or Ladur design DA3300SL CRT to tie wythes with adjustability between the wythes.
 - J-Bars and Triangular Ties with welded Restraint Bars combination provides versatility for tying the veneer to the block back-up.
- Dimensions:**
- Out-to-out spacing of deformed side rods is approximately 2 inches (50mm) less than the nominal thickness of the backing.
 - Standard length is 10 feet (3050mm) with the Tabs welded at 16 inches (400mm) on center.
 - J-Bars are 52 inches (1320mm) length.
- Wire Gages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
 - Tabs and Triangular Ties are 3/16 inch (5mm) wire.
 - J-Bars are 3/8 inch (10mm) rod.
- Finishes:**
- Brite Basic, Mill Galvanized, Hot Dip Galvanized and Stainless Steel.
 - DUR-O-WAL recommends Mill Galvanized for Interior applications, (not glass block).
 - DUR-O-WAL recommends Hot Dip Galvanized for all Exterior applications, including glass block masonry and where Mean Relative Humidity exceeds 75%.
 - Multiwythe walls are considered exterior applications and should be Stainless Steel or Hot Dip Galvanized.
 - Always check local building codes for requirements.
- Advantages:** Tests show continuous reinforcement improves masonry wall performance by providing:
- Crack control.
 - Greater elasticity.
 - Butt-welded, single plane construction.
 - High bond with the deformed side rods.
 - Better resistance to rain penetration.
 - Increased horizontal flexural strength.
- Special Notes:** Prefabricated Corners and Tees are available and measure 32 inches (810mm) x 3 inches (810mm) and Corners must be designated as Outside or Inside Corners.

Reinforcing Requirements

Building codes generally define reinforced masonry by requiring that the sum of the areas of horizontal and vertical reinforcement be at least 0.002 times the gross cross-sectional area of the wall with the minimum in either direction not less than 0.0007 times the wall area. Reinforcement is also limited to a maximum spacing of 4 feet (1220mm) on center.

DUR-O-WAL Truss and Ladur Type joint reinforcements may be considered part of the required minimum horizontal reinforcement.

In many cases, the steel requirement can be satisfied entirely by the use of DUR-O-WAL products and/or will reduce the amount of steel required in bond beams to meet code requirements. It should be noted, that the codes also require sufficient steel reinforcement to resist all live and dead loads imposed upon the structure. But even when more than the minimum steel is required, the use of DUR-O-WAL joint reinforcement, as a part of this steel, will reduce the number of bond beams needed.

MINIMUM AREA OF HORIZONTAL STEEL REQUIRED TO SATISFY CODE REQUIREMENTS*

Nominal Wall Thickness in/(mm)	4" (100)	6" (150)	8" (200)	10" (250)	12" (300)	14" (350)	16" (400)	18" (450)	20" (500)	22" (550)	24" (600)
Gross Area in ² /ft. (mm ² /m)	43.50 (92,000)	67.5 (140,276)	91.50 (193,522)	115.5 (244,282)	139.5 (295,042)	163.5 (345,802)	187.5 (396,562)	211.5 (447,322)	235.5 (498,082)	259.5 (548,842)	283.5 (599,602)
Total area of steel in ² /ft (mm ² /m) .002 x Gross Area	0.087 (184.0)	0.135 (285.5)	0.183 (387.0)	0.231 (488.6)	0.279 (590.0)	0.327 (691.6)	0.375 (793.1)	0.423 (894.6)	0.471 (996.2)	0.519 (1097.7)	0.567 (1199.2)
Horizontal Steel Required in ² /ft (mm ² /m)	0.030 (63.5)	0.047 (99.4)	0.064 (135.4)	0.081 (171.3)	0.098 (207.3)	0.114 (241.1)	0.131 (277.1)	0.148 (313.0)	0.165 (349.0)	0.182 (385.0)	0.198 (418.8)

*Compare area of steel required with area supplied by DUR-O-WAL Ladur or Truss

AREA OF STEEL SUPPLIED BY DUR-O-WAL LADUR TYPE REINFORCEMENT* in²/ft (mm²/m)

Vertical Spacing	2-#9 Side Rods	2-3/16" Side Rods	4-#9 Side Rods	4-3/16" Side Rods
8" (200)	.052 (110.0)	.083 (175.5)	.104 (220.0)	.166 (351.1)
16" (400)	.026 (55.0)	.041 (86.7)	.052 (110.0)	.083 (175.5)

*Regular DUR-O-WAL Truss can also be used to provide reinforcement. Diagonal cross wires may interfere with grout and reinforcing steel placement. DUR-O-WAL recommends the use of Ladur Masonry Reinforcement when a wall is to be vertically reinforced and/or grouted.

REINFORCEMENT FOR BOND BEAM AT TOP OF 8" & 12" CM WALLS WHEN DUR-O-WAL LADUR IS USED*

Ladur Type	Spacing	8" Wall (200)					12" Wall (300)				
		8' (2400)	12' (3660)	16' (4880)	20' (6100)	24' (7310)	8' (2400)	12' (3660)	16' (4880)	20' (6100)	24' (7310)
Standard Weight	8" (200) O.C.	1#4	1#5	1#5	2#4	1#6	1#6	1#7	1#8	2#7	1#10
	16" (400) O.C.	2#4	1#7	1#8	2#6	2#7	1#7	2#6	2#7	2#8	2#9
Extra Heavy Weight	8" (200) O.C.	1#3	1#3	1#4	1#4	1#4	2#4	1#7	1#8	2#6	1#9
	16" (400) O.C.	1#5	1#6	1#7	1#8	2#6	1#7	2#6	2#7	2#8	2#9
Super Heavy Weight	8" (200) O.C.	1#3	1#3	1#3	2#3	1#3	1#3	1#5	1#5	1#6	1#7
	16" (400) O.C.	2#3	1#5	1#6	1#7	2#5	1#7	1#8	2#7	2#7	2#8

* Request DUR-O-WAL publications; Reinforcing Masonry Walls With Joint Reinforcement, A Design Aid, Bulletin 83-7, Building Reinforced Masonry Walls with Joint Reinforcement, Bulletin 84-10. Reinforcing Shear Walls with Joint Reinforcement, Bulletin 85-1 2R. For information on the use of DUR-O-WAL to resist horizontal bending, Masonry Reinforcement in High-Rise, Bearing Wall Buildings, Bulletin 74-6.

Dur-O-Wal Specifications

SELECTION TABLE FOR DUR-O-WAL TRUSS**																	
Design Types	Weight Classifications and wire sizes			Wall Widths			Effective Areas in ² (mm ²) per 10ft of Truss										
				Single Wythe	Composite or Cavity		No. 3 (for 3" wall)	No. 4 (for 4" wall)	No. 6 (for 6" wall)	No. 8 (for 8" wall)	No. 10 (for 10" wall)	No. 12 (for 12" wall)	No. 13 (for 13" wall)	No. 14 (for 14" wall)	No. 16 (for 16" wall)	No. 18 (for 18" wall)	No. 20 (for 20" wall)
Single wythe Composite or Cavity*	Class	Side Rods	Cross Rods	Overall Wall Width	Overall Wall Width	Backup Wall Width											
Dur-O-Wal Truss	Standard	No.9 W 1.7	No.9 W 1.7	3" to 20" (75 to 500)			.052 (33.6)	.051 (32.9)	.050 (33.6)	.048 (31.0)	.047 (30.3)	.045 (29.0)	.045 (29.0)	.044 (28.4)	.043 (27.7)	.042 (27.1)	
	Extra Heavy	3/16" W 2.8	No.9 W 1.7					.073 (47.1)	.072 (46.5)	.071 (45.8)	.069 (44.5)	.068 (43.9)	.066 (42.6)	.066 (42.6)	.065 (41.9)	.064 (41.3)	.063 (40.6)
Dur-O-Wal Truss Trirod	Standard	No.9 W 1.7	No.9 W 1.7		8" to 24" (200 to 600)	3" to 12" (75 to 300)	Not made for 3", 4", 6" walls			.066 (42.6)	.064 (41.3)	.063 (40.6)	.062 (40.0)	.061 (39.4)	.060 (38.7)	.060 (38.7)	.059 (38.1)
	Extra Heavy	3/16" W 2.8	No.9 W 1.7				Not made for 3", 4", 6" walls			.097 (62.6)	.095 (61.3)	.094 (60.6)	.093 (60.0)	.093 (60.0)	.092 (59.4)	.091 (58.7)	.090 (58.1)
Dur-O-Wal Truss Double Side Rod	Standard	No.9 W 1.7	No.9 W 1.7		10" to 24" (250 to 600)	3" to 12" (75 to 300)	Not made for 3", 4", 6", 8" walls			.081 (52.3)	.080 (51.6)	.079 (51.0)	.079 (51.0)	.078 (50.3)	.077 (49.7)	.076 (49.0)	
	Extra Heavy	3/16" W 2.8	No.9 W 1.7				Not made for 3", 4", 6", 8" walls			.123 (79.4)	.122 (78.7)	.121 (78.1)	.120 (77.4)	.119 (76.8)	.119 (76.8)	.118 (76.1)	

*When cavities are insulated, check for effect or differential movement

** Effective area of DUR-O-WAL Truss, Trirod and Double includes side rods plus an allowance for the tensile resistance of the diagonal cross rods which is equal to the diagonal cross rod area times the cosine of the angle between the diagonal cross rod and side rod.

SELECTION TABLE FOR DUR-O-WAL LADUR																
Design Types	Weight Classifications and wire sizes			Wall Widths			Effective Areas in ² (mm ²) per 10ft of Ladur									
				Single Wythe	Composite or Cavity		No. 3 (for 3" wall)	No. 4 (for 4" wall)	No. 6 (for 6" wall)	No. 8 (for 8" wall)	No. 10 (for 10" wall)	No. 12 (for 12" wall)	No. 13 (for 13" wall)	No. 14 (for 14" wall)	No. 16 (for 16" wall)	No. 18 (for 18" wall)
Single wythe Composite or Cavity*	Class	Side Rods	Cross Rods	Overall Wall Width	Overall Wall Width	Backup Wall Width										
Dur-O-Wal Ladur	Standard	No.9 W 1.7	No.9 W 1.7	3" to 20" (75 to 500)			.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)	.0346 (22.3)
	Extra Heavy	3/16" W 2.8	No.9 W 1.7					.0554 (35.7)	.0554 (35.7)	.0554 (35.7)	.0554 (35.7)	.0554 (35.7)	.0554 (35.7)	.0554 (35.7)	.0554 (35.7)	.0554 (35.7)
Dur-O-Wal Ladur Trirod	Standard	No.9 W 1.7	No.9 W 1.7		8" to 24" (200 to 600)	3" to 12" (75 to 300)	Not made for 3", 4", 6" walls			.0519 (33.5)	.0519 (33.5)	.0519 (33.5)	.0519 (33.5)	.0519 (33.5)	.0519 (33.5)	.0519 (33.5)
	Extra Heavy	3/16" W 2.8	No.9 W 1.7				Not made for 3", 4", 6" walls			.0831 (53.6)	.0831 (53.6)	.0831 (53.6)	.0831 (53.6)	.0831 (53.6)	.0831 (53.6)	.0831 (53.6)
Dur-O-Wal Ladur Double Side Rod	Standard	No.9 W 1.7	No.9 W 1.7		10" to 24" (250 to 600)	3" to 12" (75 to 300)	Not made for 3", 4", 6", 8" walls			.0692 (44.6)	.0692 (44.6)	.0692 (44.6)	.0692 (44.6)	.0692 (44.6)	.0692 (44.6)	.0692 (44.6)
	Extra Heavy	3/16" W 2.8	No.9 W 1.7				Not made for 3", 4", 6", 8" walls			.1108 (71.5)	.1108 (71.5)	.1108 (71.5)	.1108 (71.5)	.1108 (71.5)	.1108 (71.5)	.1108 (71.5)


*When cavities are insulated, check for effect or differential movement

BRACE-RIGHT System

The BRACE-RITE™ System Pipe Braces are available in three sizes to support various masonry wall height dimensions.

BRACE DESIGNATION	DESCRIPTION	LENGTH ADJUSTMENT RANGE
BRACE-RITE BR20	Regular Pipe Brace	13'-0" to 20'-6"
BRACE-RITE BR23	Heavy Duty Regular Pipe Brace	14'-6" to 23'-6"
BRACE-RITE BR39	Heavy Duty Long Pipe Brace	22'-6" to 39'-0"

When ordering BRACE-RITE braces, indicate the brace designation and application type. Brace application types apply to BR20, BR23 and BR39 designations.

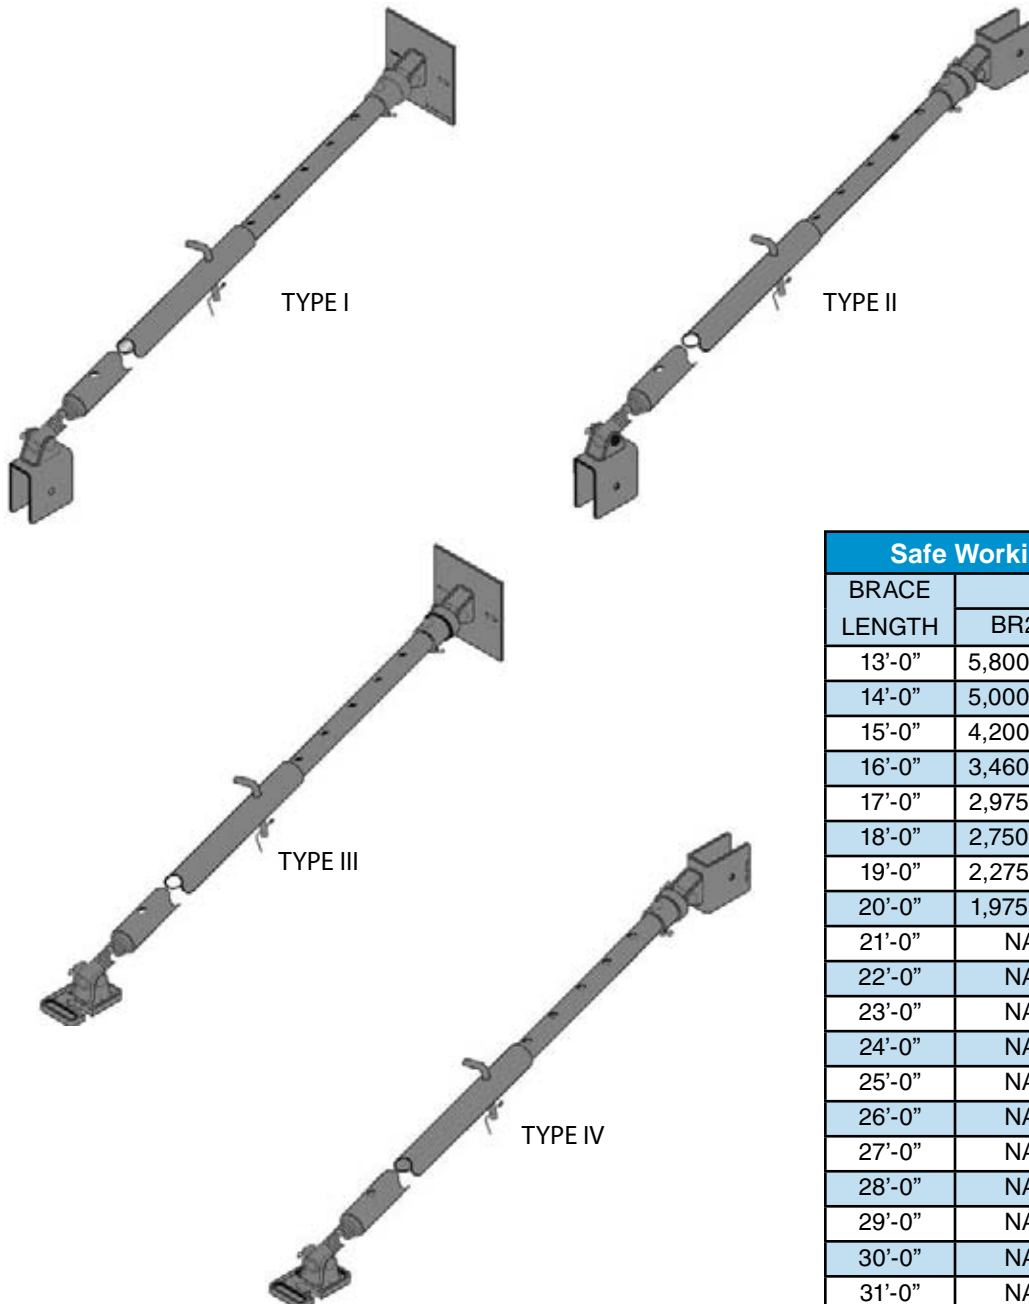

Safe Working Loads for Braces*			
BRACE LENGTH	BRACE DESIGNATION		
	BR20	BR23	BR39
13'-0"	5,800 lbs.	NA	NA
14'-0"	5,000 lbs.	NA	NA
15'-0"	4,200 lbs.	6,500 lbs.	NA
16'-0"	3,460 lbs.	6,500 lbs.	NA
17'-0"	2,975 lbs.	6,270 lbs.	NA
18'-0"	2,750 lbs.	5,250 lbs.	NA
19'-0"	2,275 lbs.	4,100 lbs.	NA
20'-0"	1,975 lbs.	3,575 lbs.	NA
21'-0"	NA	2,880 lbs.	NA
22'-0"	NA	2,410 lbs.	NA
23'-0"	NA	2,080 lbs.	5,585 lbs.
24'-0"	NA	NA	4,905 lbs.
25'-0"	NA	NA	4,250 lbs.
26'-0"	NA	NA	3,325 lbs.
27'-0"	NA	NA	2,715 lbs.
28'-0"	NA	NA	2,280 lbs.
29'-0"	NA	NA	1,850 lbs.
30'-0"	NA	NA	1,600 lbs.
31'-0"	NA	NA	1,250 lbs.

*Safe Working Load based on a safety factor of 1.5.

BRACE-RIGHT™ System


DA800MP MOUNTING PLATE

Mounting Plate connects to wall face and bears on the brace side of the wall. It is manufactured from 3/8" thick steel plate conforming to ASTM A36. The pipe brace is attached with a 5/8" diameter button head pin.




DA800BP and DA800SBP BACKING PLATE

Backing Plate is installed on the unbraced side of the wall. The Backing Plate is manufactured from 3/8" steel plate conforming to ASTM A36. The DA800BP is used when the brace is attached directly to the wall. Two slots are provided to accommodate the Wall Ties which are inserted through the bed joints of the wall. The DA800SBP Strongback Backing Plate is installed on the unbraced side of the wall when a strongback is used. One slot is provided to accommodate the Wall Tie which is inserted through the head joint of the wall.

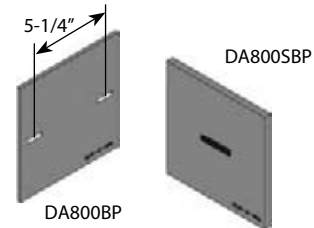

DA800WT WALL TIES

Wall Ties connect the mounting plate to the backing plate through the wall. They are manufactured from high strength steel. The safe working load is 3,000 pounds with the approximate factor of safety of 2 to 1. The wall ties are available in two sizes. DA800WT610 accommodates 6" and 10" block. DA800WT812 is used with 8" and 12" block.

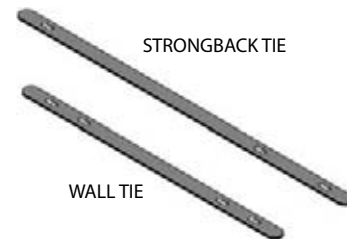

DA800ST STRONGBACK TIES

Strongback Ties are used to tie strongbacks to the wall. DA800ST610 accommodates 6" and 10" CMU plus the strongback. DA800ST812 is used with 8" and 12" CMU and the strongback.

DA800W WEDGES

Wedges are manufactured from 3/16" high carbon steel for maximum gripping strength.



DA800BC Brace Clip

Brace Clip connects the brace to an aluminum horizontal strut or strongback. It is manufactured with 3/8" steel plate conforming to ASTM A36. The safe working load is 3,000 lbs. Attach brace clip to strongback or strut with 1/2" diameter, Grade 5 bolt and nut.



DA800FB Floor Bracket

Floor Bracket casting connects the brace to a concrete slab, foundation or deadman. Use with DA800CA Coil Anchor. Safe Working Load is 6,500 lbs.

Based on the approximate factor of safety of 1-1/2 to 1.




DA800CA Coil Anchor

3/4" x 4-1/2" long Coil Anchor is used to attach the floor bracket to concrete floor slab or deadman. Use with DA800FB.



DA800FC Foundation Clip

Foundation Clip is used to connect the horizontal strut to a deadman, sled or other above grade anchorage. It is manufactured from 3/8" steel plate conforming to ASTM A36. Fasten to concrete with two 1/2" anchor bolts.



DA800S Strongbacks and Struts

Strongbacks and Struts are extruded from 6061-T6 structural aluminum. Tubes are punched to allow for attachment of brace and foundation clips as well as wall ties.

The Strongback is a vertical stiffening beam that is attached to the wall on the brace side of the wall. It is typically used when the vertical bending strength of the wall is not adequate to resist wind load between brace points. The Strongback is attached to the wall with a DA800ST Strongback Tie located in vertical head joints at 4'-0" spacing. Strongback ties are attached to DA800SBP Backing Plates on the opposite side of the wall. Individual tubes can be spliced with DA800SP Splice Plates to form strongbacks that are 20", 24" or 28" long. The Strongback has a section modulus of 2.0 In.³ and a bending moment safe working load capacity of 2,500 lb. ft.


The Strut is a horizontal member used to transfer horizontal brace loads to the wall foundation when the brace anchor does not have the capability to resist horizontal loads itself. Struts are generally used with concrete deadmen above grade.




DA800S



DA800SBC

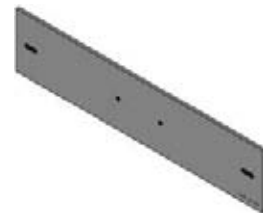

DA800SP



DA800SC

Restoration Anchors

DUR-O-WAL has a complete line of quality restoration products that includes a variety of mechanical and friction pinning anchors as well as replacement systems for seismic and non-seismic applications.

Some of the more popular anchors are shown here with brief information. Additional types available. For additional information request a copy of the Dur-O-Wal *Masonry Repair Handbook* (dow2).

DA5000 MECHANICAL ANCHOR SERIES

Function: Designed to restrain veneers to backing materials of solid concrete, brick, solid CMU and stone.




DA5100 MECHANICAL ANCHOR SERIES

Function: Designed to restrain veneers to backing material of brick, hollow CMU, solid CMU, stone, clay tile and precast concrete.



DA5300 MECHANICAL ANCHOR SERIES

Function: Designed to restrain veneers to backing material of wood stud, steel stud and wood sheathing.



DA508 DUR-O-FLEX FRICTION PINNING ANCHOR


Function: Designed for variety of backing materials for wall tying applications that typically would use masonry connectors of the light to medium duty variety.



DA5213; DA5213 S; DA5431; DA5801 BRICK REPLACEMENT ANCHORS

Function: Designed to replace brick in retrofit applications and to anchor veneers in new construction to concrete, block and brick backings and into mortar joints. Each anchor is provided with a 7/16 inch (11mm) Expansion Anchor Fastener which comes assembled on the Plate or Anchor for 2 inches (50mm) embedment in backing.

Finishes: Hot Dip Galvanized or Stainless Steel for the Anchor parts. Expansion Anchor Fastener consists of either a Carbon Steel or Stainless Steel. 1/4" - 20 NC Hex Head Bolt with Washer and a Brass Sleeve and Brass Expander Cone.

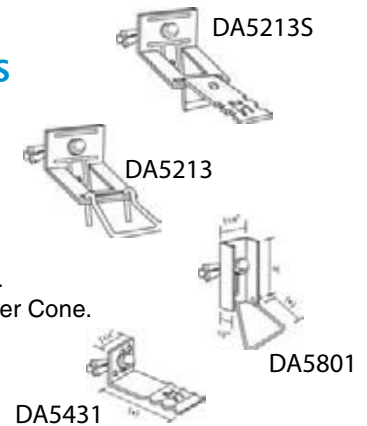

DUR-O-WAL masonry products are intended for use by trained, qualified and experienced workmen only. Misuse or lack of supervision and/or inspection can contribute to serious accidents or deaths. Any application other than those shown in this publication should be carefully tested before use.

The user of DUR-O-WAL products must evaluate the product application, determine the safe working load and control all field conditions to prevent applications of loads in excess of a product's safe working load. The safety factors shown in this publication are approximate minimum values. The data used to develop safe working loads and/or usage rates for products displayed in this publication are a combination of actual testing and/or other industry sources. Recommended safe working loads and/or usage rates, if given for the products in this publication, must never be exceeded.

Worn Working Parts

For safety, masonry accessories must be properly used and maintained. Masonry accessories shown in this publication may be subject to wear, overloading, corrosion, deformation, intentional alteration and other factors that may affect the device's performance. All reusable accessories must be inspected regularly by the user to determine if they may be used at the rated safe working load or should be removed from service. The frequency of inspections depends upon factors such as (but not limited to) the amount of use, period of service and environment. It is the responsibility of the user to schedule accessory hardware inspections for wear and remove the hardware from service when wear is noted.

Shop or Field Modification

Welding can compromise the safe working load value and cause hazardous situations. Knowledge of materials, heat-treating and welding procedures is necessary for proper welding. Consult a local welding supply dealer for assistance in determining required welding procedures.

Since DUR-O-WAL cannot control workmanship or conditions in which modifications are done, DUR-O-WAL cannot be responsible for any product altered in the field.

Interchangeability

Many masonry accessory products that DUR-O-WAL manufactures are designed as part of a system. DUR-O-WAL strongly discourages efforts to interchange products supplied by other manufacturers with components supplied by DUR-O-WAL. When used properly, and in accordance with published instructions, DUR-O-WAL products have proven to be among the best designed and safest in the industry. Used improperly or with incompatible components supplied by other manufacturers, DUR-O-WAL products or systems may be rendered ineffective and/or unsafe.

Design Changes

DUR-O-WAL Masonry Accessories reserves the right to change product designs, rated loads and product dimensions at any time without prior notice.

General Disclaimer

The information contained in this publication does not constitute any professional opinion or judgement and should not be used as a substitute for competent professional determinations.


Each construction project is unique and the appropriate use of this product is the responsibility of the engineers, architects, and other professionals who are familiar with the specific requirements of the project.

General Warranty

Seller makes no warranty of any kind, except that the goods sold under this agreement shall be of the standard quality of the seller, and buyer assumes all risk and liability resulting from the use of the goods, whether used singly or in combination with other goods. Seller neither assumes nor authorizes any person to assume for seller any other liability in conjunction with the sale or use of the goods sold, and there is no oral agreement or warranty collateral to or affecting this transaction.



We have the most complete dealer network in North America.
For the dealer nearest your project, simply call the office in your region.

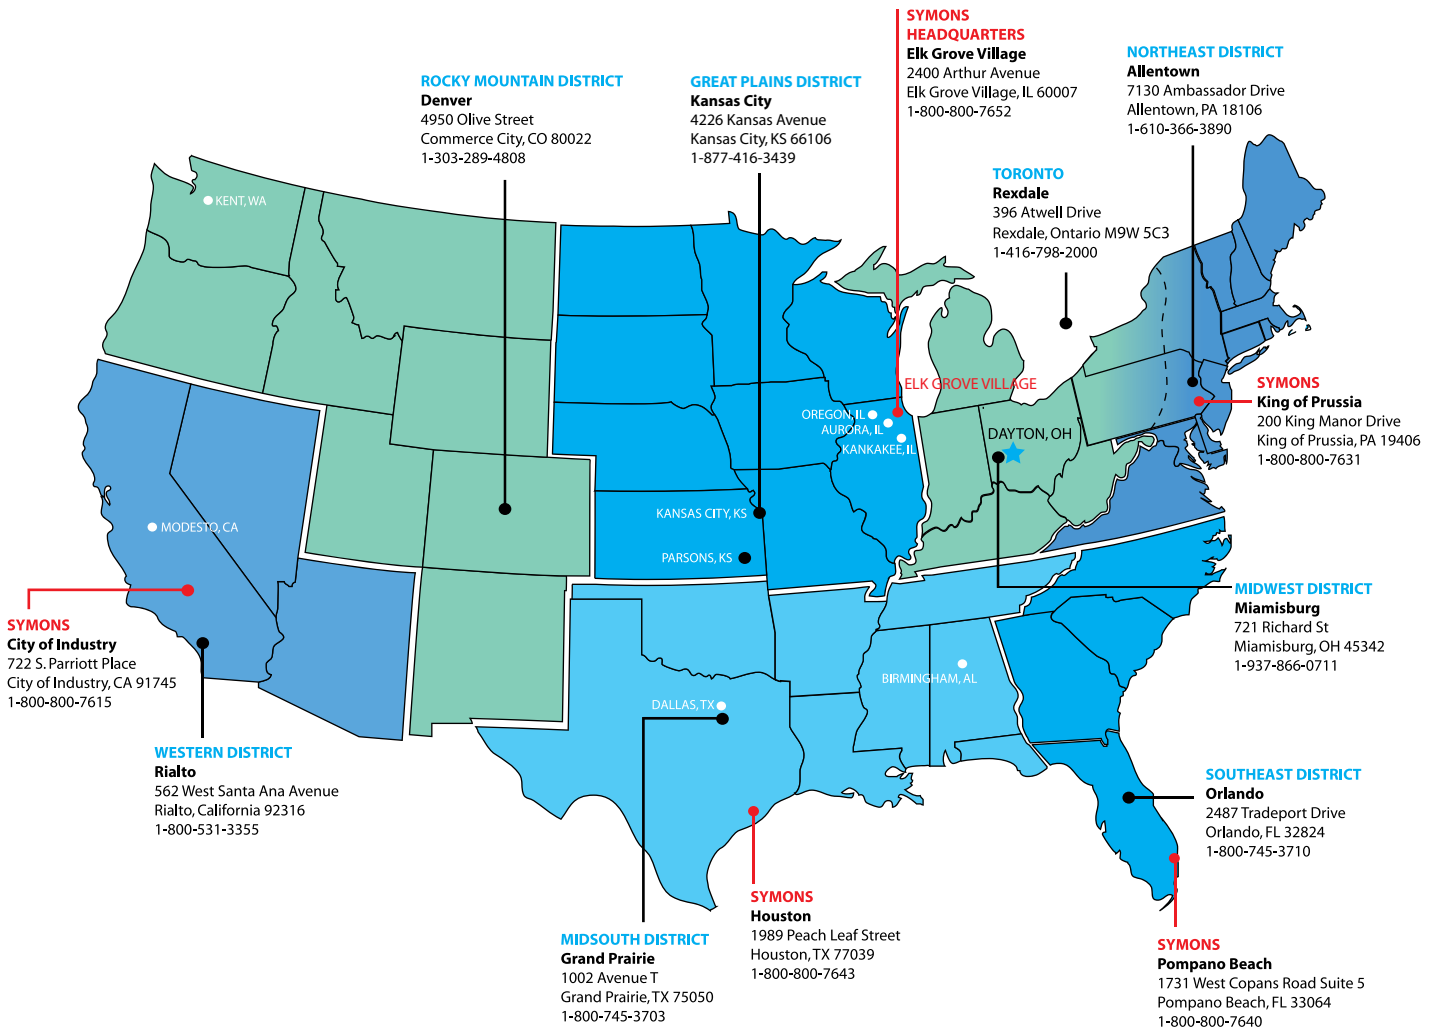

DAYTON SUPERIOR CORPORATION
7777 WASHINGTON VILLAGE DRIVE, SUITE 130
DAYTON, OH 45459
PHONE: 937-428.6360
TOLL FREE: 877-632.9866
FAX: 937-428.9560
DAYTONSUPERIOR.COM